

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199955741 B2
(10) Patent No. 772661

(54) Title
Methods and apparatus for regional and whole body temperature modification

(51)⁶ International Patent Classification(s)
A61F 007/00

(21) Application No: 199955741 (22) Application Date: 1999.08.20

(87) WIPO No: W000/10494

(30) Priority Data

(31) Number	(32) Date	(33) Country
09/138830	1998.08.24	US

(43) Publication Date : 2000.03.14

(43) Publication Journal Date : 2000.05.11

(44) Accepted Journal Date : 2004.05.06

(71) Applicant(s)
Radiant Medical, Inc.

(72) Inventor(s)
Robert Ginsburg; Timothy R. Machold; Michael T. Dineen

(74) Agent/Attorney
Davies Collison Cave, Level 15, 1 Nicholson Street, MELBOURNE VIC 3000

(56) Related Art
US 5716386
US 5486208

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61F 7/00		A1	(11) International Publication Number: WO 00/10494
			(43) International Publication Date: 2 March 2000 (02.03.00)
(21) International Application Number: PCT/US99/18939		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 20 August 1999 (20.08.99)			
(30) Priority Data: 09/138,830 24 August 1998 (24.08.98) US			
(71) Applicant: RADIANT MEDICAL, INC. [US/US]; 250 Chesapeake Drive, Redwood City, CA 94063 (US).			
(72) Inventors: GINSBURG, Robert; 5100 S. Steele Street, Greenwood Village, CO 80121 (US). MACHOLD, Timothy, R.; 65 Bernal Avenue, Moss Beach, CA 94038 (US). DINEEN, Michael, T.; 190 Webster Street, Palo Alto, CA 94301 (US).			
(74) Agents: BUYAN, Robert, D. et al.; Stout, Uxa, Buyan & Mullins, LLP, 4 Venture #300, Irvine, CA 92618 (US).		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: METHODS AND APPARATUS FOR REGIONAL AND WHOLE BODY TEMPERATURE MODIFICATION

(57) Abstract

This invention is methods, and apparatus for temperature modification of selected body regions including an induced state of local hyperthermia of the brain region for neuro-protection. A heat exchange catheter (360) is provided with heat transfer fins (362) projecting or extending outward from the catheter which may be inserted into selected blood vessels or body regions to transfer heat with blood or fluid in the selected blood vessels or body regions. Another aspect of the invention further provides methods, and apparatus for controlling the internal body temperature of a patient. By selectively heating or cooling a portion of the catheter (360) lying within a blood vessel, heat may be transferred to or from blood flowing within the vessel to increase or decrease whole body temperature or temperature of a target region. The catheter (360) may be used alone or in conjunction with other heat exchangers to cool one region of a patient's body while heating another.

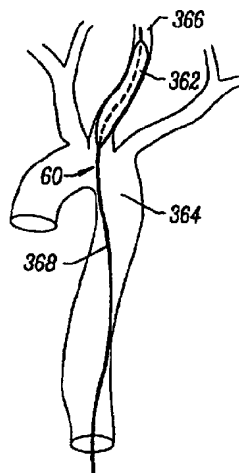

P:\PSPRDS\03\747-09\response.doc-03/03/04

- 1 -

FIELD OF THE INVENTION

The present invention generally relates to a catheter device. The present invention
5 also relates to the selective modification and control of a patient's body temperature, and to
the regulation of the temperature of a fluid that is to be delivered to a specific target
location within a body structure. More particularly, the invention provides methods and
apparatus for treating or inducing hypothermia or hyperthermia by inserting a catheter into
10 a blood vessel of the patient and selectively transferring heat to or from blood flowing
through the vessel, and for altering the temperature of a fluid that is to be delivered to the
target location while the fluid is within the patient.

The present invention further relates to the selective modification and control of
whole body temperature and the temperature of selected target regions of the body such as
15 the brain. More particularly, the invention is directed to methods and apparatus for
lowering the temperature of the brain by using heat transfer regions of a heat transfer
catheter to cool fluids in contact

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
215

with, or circulating in, around, or leading to the brain region to provide regional hypothermia and temperature control.

BACKGROUND OF THE INVENTION

Under ordinary circumstances, the thermal regulatory system of the human body maintains a near constant temperature of about 37°C (98.6°F). Heat lost to the environment is precisely balanced by internal heat produced within the body.

Hypothermia is a condition of abnormally low body temperature generally characterized by a core body temperature of 35°C or less, and may be further clinically defined according to its severity. For example, a body core temperature within the range of 32°C to 35°C may be described as mild hypothermia, 30°C to 32°C as moderate, 24°C to 30°C as severe, and a body temperature of less than 24°C may constitute profound hypothermia. Although the above ranges may provide a useful basis for discussion, they are not absolutes and definitions vary widely as indicated in the medical literature.

Hyperthermia may be defined as a condition of abnormally high body temperature, and may be the result from exposure to a hot environment or surroundings, overexertion, or fever. Body core temperatures may range from 38°C to 41°C due to conditions such as fever, and may be substantially higher in cases of exposure and overexertion. Like hypothermia, hyperthermia is a serious condition that can be fatal.

Although both hypothermia and hyperthermia may be harmful and require treatment in some case, in other cases hyperthermia or hypothermia, and particularly hypothermia, may be therapeutic or otherwise advantageous, and

therefore may be intentionally induced. For example, periods of cardiac arrest in the setting of myocardial infarction and heart surgery can produce brain damage or other nerve damage. Hypothermia is recognized in the medical community as an accepted neuroprotectant during cardiovascular surgery and
5 therefore a patient is often kept in a state of induced hypothermia during cardiovascular surgery. Likewise, hypothermia is sometimes induced as a neuroprotectant during neurosurgery. Hypothermia may also be beneficial in other situations, for example, for victims of head trauma, spinal trauma, brain attack (also sometimes called stroke), spinal surgery or surgery where blood
10 flow may be interrupted or compromised to the brain or spinal cord such as aneurysm repair, as well as other types of surgery where neuroprotection is desirable.

Neural tissue, that is all tissue of the nervous system such as the brain or spinal cord, is particularly subject to damage by vascular disease processes
15 including, but not limited to ischemic or hemorrhagic stroke, blood deprivation for any reason, including cardiac arrest, intracerebral hemorrhage and head trauma. In each of these instances, damage to brain tissue may occur because of ischemia, pressure, edema or other processes resulting in a loss of cerebral function and permanent neurological deficits. Lowering the brain temperature
20 may confer neuroprotection through several mechanisms including the blunting of post-insult elevation of neurotransmitters such as glutamate, reduction of cerebral metabolic rate, moderation of intracellular calcium, prevention of intracellular protein synthesis inhibition, and reduction of free radical formation as well as other enzymatic cascades and even genetic responses. Thus
25 intentionally induced hypothermia may prevent some of the damage to brain or

other neurological tissue during surgery or as a result of stroke, intracerebral hemorrhage and trauma.

Treatment of stroke in particular is a possibly therapeutic use of intentionally induced hypothermia. Stroke (sometimes called brain attack) is a
5 severely debilitating and complex disease that results from the blockage (ischemic stroke) or rupture (hemorrhagic stroke) of a blood vessel within or leading to the brain region. During a stroke, brain cells are damaged either by a lack of oxygen or by increased pressure. These events can eventually result in death and necrosis of brain tissue. In general, at least one goal in the therapeutic
10 intervention for stroke is to preserve the function of as much brain tissue as possible. However, current medical treatment for stroke is largely supportive in nature. Newer treatments, for example clot-dissolving drugs, are available but may be only suitable for treatment of ischemic strokes and must generally be used shortly (within several hours) of the initial stroke symptoms to avoid side
15 effects related to bleeding within the brain. In practice, it has been difficult to treat strokes within this time window since patients often do not arrive at a medical facility until several hours after the onset of a stroke. As a result, most strokes are not aggressively treated with medical therapy. A treatment to prolong this time window, and to protect brain cells from death, would have a
20 profound impact on patient care.

Experimental studies of ischemia have shown reduction in infarcted brain tissue volume in animals treated with hypothermia during or shortly after a stroke or ischemic insult. It is therefore believed that the application of hypothermia to a patient who is suffering or has recently suffered a stroke may
25 be beneficial.

Despite the acceptance of hypothermia as a neuroprotectant, it has not been widely used outside of the surgical setting. Additionally, most current practices attempt to provide hypothermia to the brain by inducing whole body hypothermia through systemic treatment. However, whole body hypothermia presents numerous difficulties and is cumbersome to implement in a patient who is not under general anesthesia. Lowering the systemic temperature of a patient not only takes a significant amount of time, but also subjects the patient to deleterious effects of hypothermia including cardiac arrhythmias, coagulation problems, increased susceptibility to infections, and problems of discomfort such as profound shivering.

Control of the body's temperature, for example, to maintain normothermia (usually 37°C), is often desirable. For example, in a patient under general anesthesia, the body's normal temperature regulating mechanisms may not be fully functioning, and the anesthesiologist may be required to artificially control the patient's body temperature. Similarly, a patient may lose an extraordinary amount of heat to the environment, for example, during major surgery, and the patient's unaided body may not be able to generate sufficient heat to compensate for the heat lost. A device and method for controlling body temperature, for example by adding heat to maintain normothermia, would be desirable.

Particularly in the surgical setting, it has sometimes been the case that blood or other fluid was heated or cooled outside a patient's body and introduced into the body to heat or cool the body or some target location within the body. However, heating or cooling fluids outside of the patient may be cumbersome and require elaborate equipment. For example, in surgery, the

temperature of a patient may be controlled by a bypass machine where a significant amount of the patient's blood is removed, heated or cooled outside the body in a by-pass machine, and reintroduced to the patient's blood stream.

One particular application of this procedure is whole body hypothermia

5 sometimes induced during heart surgery. Other examples include hypothermia induced during neurosurgery or aortic or other vascular surgery.

The use of an external method for inducing hypothermia, such as a bypass machine, is an extremely invasive procedure that subjects vast quantities of the patients' blood to pumping for an extended length of time. External
10 pumping of blood may be harmful to the blood, and continued pumping of blood into a patient for extensive periods of time, for example, more than one or two hours, is generally avoided. Additionally, such a procedure may require systemic treatment of the patient, for example, with heparin to prevent clotting which may present other undesirable consequences in a stroke victim.

15 Means of imparting heat to the blood of a patient, or removing heat from the patient, which do not require external pumping have been proposed. For example, one particular catheter structure which has been developed to treat patients suffering from either hypothermia or hyperthermia is described in U.S. Patent No. 5,486,208, to Ginsburg, the complete disclosure of which is herein
20 incorporated by reference. That patent issued from one of the applications from which this application claims priority. A catheter disclosed in that patent was inserted into a blood vessel and a portion of the catheter heated or cooled, transferring heat to the patient's blood and thereby affecting the overall body temperature of the patient. However, while such devices and methods may
25 avoid the problems associated with external pumping of blood, they do not

eliminate the difficulties that arise when the entire body is subjected to hypothermia.

There have been attempts to achieve regional cerebral hypothermia, for example by placing the head in a cooled helmet or shroud, or even injecting a cold solution into the head region. Attempts to achieve brain cooling by directly cooling the surface of the head have proven impractical or ineffective because of factors such as the insulating qualities of the skull, which make it difficult to effectively lower brain core temperature, and the blood flow that may fail to provide sufficient heat transfer circulation to the brain itself when the surface of the head is cooled. Patients, especially patients not under general anesthesia, may also find it difficult to tolerate immersion or direct exposure of the head to a cold solution or cooling surface.

An apparatus to facilitate transfer of heat to or from a target location by means of internally applied heating or cooling would be advantageous. It has been known in the art to impart heat by direct contact with specific tissue by means of a balloon catheter. For example, in U.S. Patent No. 5,019,075 to Spears, a heated balloon was described to apply heat directly from the surface of the balloon to the wall of an artery dilated during percutaneous transluminal coronary angioplasty (PTCA) to fuse together disrupted tissue. This device, however, operated by direct contact between the vessel wall in question and a greatly heated balloon surface.

Balloons capable of acting as ongoing heat transfer balloons by the continual flow of heat transfer medium through the balloon have also been shown. For example, in U.S. Patent No. 5,624,392 to Saab, a concentric inflow and outflow lumen each terminate within the heat transfer balloon so that a

continual flow of heat transfer liquid can be maintained within the balloon for controlled heat transfer to the adjacent tissue.

U.S. Patent No. 5,269,758 to Taheri, discloses a balloon in which heated fluid such as heated saline solution is circulated through a balloon that pulses.

5 The heat from the heat transfer liquid may then be imparted to the blood as it flows past the balloon to treat hypothermia in a patient. The flow of the affected blood is not otherwise generally directed nor is the temperature of a target region disclosed to be altered by the heated balloon of Taheri.

The configuration of balloons to provide channels for the flow of blood
10 from the proximal side to the distal side of a balloon blocking a blood vessel, such as a balloon used for PTCA has also been shown. For example, such an autoperfusion balloon angioplasty catheter is shown in U.S. Patent No. 4,581,017 to Sahota, and the multi-lumen balloon shown in U.S. Patent No. 5,342,301 to Saab as discussed for use in angioplasty discloses a multi-lumen
15 balloon catheter configured to allow blood to perfuse from the proximal side to the distal side of a balloon angioplasty catheter when the balloon is inflated to apply angioplastic pressure against the blood vessel walls and otherwise fully obstruct blood passage.

It would be desirable to devise an apparatus capable of heating or
20 cooling liquid such as blood within the body and directing that liquid after it is heated or cooled, to a target location. It would be particularly advantageous if a device could be devised where the liquid could be directed to a desired location using only the patient's own heart as a pump. It would also be particularly advantageous if a method could be devised for directing heated or cooled blood

P:\OPEN\AU\25741-49\report\A_Sec-0303114

- 9 -

to a target region of a patient's body for a sufficient length of time to affect the temperature of that target region.

5 A method of treating a patient to protect tissue, and particularly neural tissue, by inducing hypothermia is desirable. Protecting particular target tissue by inducing hypothermia in that tissue by means of in situ cooling of body fluid directed to that tissue would be particularly advantageous.

10 It would also be desirable to provide a system to control such a device to perform the method of treatment in a simple and predictable manner. It would be particularly desirable if such a system could control the device in conjunction with feedback data from a patient to control the device to predictably and selectively affect the temperature of a target region in the patient.

15 Preferred embodiments of the present invention overcome or ameliorate one or more of the above mentioned difficulties, or at least provide a useful alternative.

4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158

P:\GREEN\WUC\5741-99\response\doc456304

- 10 -

SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, there is provided a catheter device which is insertable into an anatomical structure of a mammalian patient through which body fluid may flow to a target region of the patient, said catheter device being operative to effect in situ heat exchange with the body fluid to effect temperature alteration of the target region, said catheter device comprising:

an elongate flexible catheter having a proximal end and a distal end, the entire length of said flexible catheter being defined as the distance from its proximal end to its distal end;

at least one fluid lumen in through which said thermal exchange fluid may be circulated;

a heat exchanger located at a first location on the catheter, said heat exchanger being operative to exchange heat between body fluid in heat exchange proximity to said heat exchanger and heat exchange fluid circulating through said heat exchanger, said first location extending less than the entire length of the catheter;

a body-fluid channeling sleeve formed about a segment of said catheter including the first location at which at least a portion of said heat exchanger is located, said body fluid channeling sleeve defining a body fluid flow space between said body fluid channeling sleeve and said catheter, said body fluid channeling sleeve having a body fluid inlet located proximal to the heat exchanger and a body fluid outlet located distal to at least a portion of said heat exchanger, such that body fluid will enter the flow space through said body fluid inlet, will then flow through said flow space in heat exchange proximity to at least a portion of said heat exchanger, and then out of said body fluid outlet and to a conduit in fluid communication with said target region of the patient's body.

In accordance with another aspect of the present invention, there is provided a system comprising the catheter device of the invention in combination with a guide wire sized to be passable through said working lumen.

30

F:\GPR\JCV\71-99\response.doc<1000>

- 11 -

In accordance with yet another aspect of the present invention, there is provided a system comprising the catheter device of the invention in combination with an apparatus for infusion of a medicament through said working lumen.

- 5 In accordance with another aspect of the present invention, there is provided a system comprising the catheter device of the invention in combination with a diagnostic probe which is passable through said working lumen.

- 10 The invention also provides a system comprising the catheter device of the invention in combination with an apparatus for infusion of a radiographic contrast agent through said working lumen; and

an imaging apparatus for imaging the radiographic contrast agent which has been infused through said working lumen.

- 15 Embodiments of the present invention provide heat exchange catheter devices which generally comprise an elongate flexible catheter having a heat exchanger which is operative to exchange heat between blood or other body fluid which flows in heat exchanging proximity thereto. Also, embodiments of the present invention provide methods for utilizing such heat exchange catheter devices to selectively heat or cool a
20 particular region (e.g., the brain, a selected portion of the brain, the spinal cord, an organ, an intra-abdominal organ, the spleen, the liver, the heart, a portion of the heart, a lung, a kidney, a muscle, a tumor, a site where trauma has occurred, a site where hemorrhage has occurred, etc.) of the body of a mammalian patient.

25

THE NEXT PAGE IS PAGE 13

- 13 -

In accordance with the exemplary devices of the present invention, there is provided a heat exchange catheter device which may generally comprise: i) an elongate catheter having a proximal end and a distal end, the entire length of said flexible catheter being defined as the distance from its proximal end to its distal end; ii) at least one fluid lumen through which a thermal exchange fluid may be circulated, and, iii) a heat exchanger with heat exchange fins located at a first location on the catheter, and a working lumen extending from outside the patient through at least part of the catheter that is inserted into the patient. The heat exchanger is operative to exchange heat between blood which flows in heat exchanging proximity to the heat exchanger and a thermal exchange fluid which is circulated through the catheter. The "first location" at which the heat exchanger is located may constitute less than the entire length of the catheter, and is typically at or near the distal end of the catheter. The heat exchanger may specifically comprise a balloon or other structure through which the thermal exchange fluid may circulate, and the heat exchange fins may be a plurality of lobes of the balloon or may be surface area increasing projections (e.g., outwardly extending protuberances, ribs, etc.) to enhance the efficiency with which heat exchange occurs. Also, in some embodiments of the catheter device, a body fluid channeling sleeve may be formed about the portion of the catheter whereupon the heat exchanger is located (and may extend some distance proximal to the heat exchanger) to channel a flow of blood or other body fluid in heat exchanging proximity to the heat exchanger. Such body fluid channeling sleeve may thus be utilized to channel available body fluid (e.g., blood) from one anatomical conduit (e.g., the descending aorta) in which the proximal end of the sleeve is located, into a second anatomical conduit (e.g., a carotid artery) in which the distal end of the sleeve is located. The sleeve may be sized and configured to form a shoulder that forms a snug seal between the outside of the sleeve and the second anatomical conduit.

The catheter device may further be provided in combination with a device (such as a guide wire, or embolectomy catheter) or medicament (such as a thrombolytic agent or barbiturate) for insertion through the working lumen.

The catheter device of the invention may also comprise a curved heat exchange balloon with an insulated side and a thermoconductive side, and may be placed in the anatomy such that blood flowing to the brain flows past the thermoconductive side and

- 13A -

blood flowing to the rest of the body flows past the insulated side.

In embodiments of the invention a catheter device is provided in combination with a control system that senses body conditions such as temperature and controls the catheter in response to the body conditions sensed, such as turning off the heat exchanger when the patient's target region reaches a pre-selected temperature, or reactivating the heat exchanger when the temperature strays from that pre-selected temperature.

In accordance with exemplary methods of the present invention, there is provided a procedure for modulating or changing the temperature of a selected region of the body of a mammalian patient. Such method comprises the steps of:

- 10 a. inserting a catheter device of the foregoing character into an anatomical conduit of the patient's body through which a body fluid flows to the selected region of the patient's body, and positioning the catheter such that body fluid flowing through the anatomical conduit to the selected region will pass in heat exchanging proximity to the heat exchanger before reaching said selected region; and,
- 15 b. utilizing the heat exchanger of the catheter device to change the temperature of body fluid which passes in heat exchanging proximity to the heat exchanger, such that said body fluid will subsequently change the temperature of said selected region of the patient's body.

Still further in accordance with exemplary methods of the present invention, the catheter device may be positioned in a blood vessel which leads to the brain (e.g., the right common carotid artery, left common carotid artery, innominate artery, right internal carotid artery, left internal carotid artery, etc.) and used to cool the brain or a portion thereof to deter neural damage following a stroke or other insult (e.g., period of ischemia, period of hypoxia, hemorrhage, trauma, etc.).

Still further in accordance with the exemplary methods of the present invention, two or more catheter devices of the foregoing character may be simultaneously positioned at different sites within the patient's body so as to selectively heat or cool body fluid (e.g., blood) which is flowing to the selected body region, and to subsequently return such body fluid to or close to its original temperature as it flows from the selected body region. In this regard, one heat exchange catheter device may be positioned in an artery which perfuses the brain to cause cooling of the brain following a stroke or other insult, and a

P:\OFFICE\J\CS1741 97 response.doc-6963904

- 13B -

second catheter may be positioned in the inferior vena cava or other suitable vein to re-warm blood after it circulates through the brain, or to generally add heat to blood going to the trunk of a patient's body to maintain normothermia in the body at locations other than the cooled region.

5

In other embodiments of the invention, there is provided a method of controlling the heat exchange with the body fluid such that a predetermined temperature may be established at a target tissue, and may be maintained. As an additional aspect, a predetermined temperature may be established for the target tissue, for example a particular hypothermic temperature for the brain, and another temperature may be selected for another region, for example the core body temperature being normothermic, and two catheters may be simultaneously controlled to maintain both -pre-selected temperatures.

Further aspects and details of the present invention will become apparent to those of skill in the relevant art upon reading and understanding of the detailed description of preferred embodiments set forth here below. Each of the embodiments disclosed below may be considered individually or in combination with any of the other variations and aspects of the invention.

20 BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention are hereafter described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 depicts a catheter according to the present invention inserted percutaneously into a blood vessel of a patient.

5 Fig. 2 depicts a catheter in which a heated or cooled fluid flows through a balloon, which provides for an increased surface area near the distal end of the catheter.

Fig. 3 depicts a catheter having a resistance heating element at its distal end and a balloon having longitudinal ribs to further increase the heat transfer surface area.

10 Fig. 4A depicts a catheter having longitudinal fins at the distal end of the catheter body.

Fig. 4B depicts a catheter having radial ribs at the distal end of the catheter body.

15 Fig. 4C depicts a catheter having a spiral fin to increase the heat transfer area at the distal end of the catheter.

Fig. 5 is a flow chart describing the control scheme of the invention.

Fig. 6 is a diagrammatic representation of the temperature of target tissue under the influence of the control system of Fig. 5.

20 Fig. 7 illustrates a preferred catheter for the selective heating and cooling of patient blood flow employing a wire coil resistance heater and a metal foil cooling element.

Fig. 8 depicts a distal end of a catheter according to the present invention which is inserted into a vessel of a patient.

25 Fig. 8A is a cross-sectional side view of a catheter shown in Fig. 8 taken along lines A-A and depicting a temperature altering region.

Fig. 9 is a side view of an exemplary catheter for heating or cooling a fluid passing through an internal lumen according to the invention.

Fig. 10 is a more detailed view of a distal end of a catheter similarly shown in Fig. 9.

5 Fig. 11 is a side view of an alternative catheter for heating a fluid passing through an internal lumen according to the invention.

Fig. 11A is a side view of the catheter of Fig. 11 taken along lines A-A.

Fig. 12 is a side view of another alternative embodiment of a catheter for heating or cooling a fluid passing through an internal lumen and having a plurality of perfusion orifices for allowing body fluids to enter into the internal lumen according to the invention.

Fig. 13 is a cutaway side view of a portion of a catheter similarly illustrated in Fig. 12 showing a plurality of flaps which are closed to prevent body fluids from entering into the internal lumen when a liquid is externally injected into the lumen.

Fig. 14 illustrates a catheter similarly illustrated in Fig. 13 showing the flaps opening to allow body fluids to enter into the internal lumen when no fluids are externally injected into the lumen.

Fig. 15 is a perspective view of a heat transfer catheter system connected to a patient that may include monitoring devices, a controller, and a thermal catheter with multiple heat transfer portions.

Fig. 16 is a simplified perspective view of a heat transfer catheter system with a controller, disposable components, reusable components, a heat exchange balloon catheter and various sensors.

Fig. 17A is a simplified perspective view of a variation of the heat transfer catheter of the invention in place within the left common carotid artery.

Fig. 17B is a simplified perspective view of the distal portion of a finned thermal balloon catheter in accordance with one aspect of the invention having a
5 balloon heat transfer portion for supporting the circulation of heat transfer fluid.

Fig. 17C is a simplified cross-sectional view of the catheter illustrated in Fig. 17B taken along line C-C.

Fig. 17D is a simplified cross-sectional view of the catheter illustrated in Fig. 17B taken along line D-D.

10 Fig. 17E is a simplified cross-sectional view of the catheter illustrated in Fig. 17B taken along line E-E.

Fig. 18A is a simplified perspective view of a variation of the heat transfer catheter of the invention in place within the aorta, the innominate artery, and the right common carotid artery.

15 Fig. 18B is a perspective view in greater detail of the heat transfer catheter of Fig. 18A formed with a blood channeling sleeve defined by openings that may be in communication with a fluid-containing body region.

Figs. 18C is a simplified cross-sectional view of the catheter illustrated in Fig. 18B taken along line C-C.

20 Figs. 18D is a simplified cross-sectional view of the catheter illustrated in Fig. 18B taken along line D-D.

Figs. 18E is a simplified cross-sectional view of the catheter illustrated in Fig. 18B taken along line E-E.

25 Figs. 18F is a simplified cross-sectional view of the catheter illustrated in Fig. 18B taken along line F-F.

Figs. 18G is a simplified cross-sectional view of the catheter illustrated in Fig. 18B taken along line G-G.

Fig. 19 is a simplified illustration of a heat transfer catheter shown in the aorta and having a blood channeling sleeve with a proximal opening in the descending aorta and a distal opening in the left common carotid artery.

Fig. 20 is a simplified perspective view of a variation of the heat transfer catheter of the invention formed with an elongated shaft and a tapered catheter body with spiral shaped fins, and located in the aorta and left common carotid artery.

Fig. 21A is a simplified perspective view of another variation of the thermal catheter formed with an occlusive shoulder and valve assembly.

Fig. 21B illustrates a proximal or distal sleeve valve in a closed position for a thermal catheter of the type shown in Fig. 21A.

Fig. 21C illustrates a proximal or distal sleeve valve in an open position for a thermal catheter of the type shown in Fig. 21A.

Fig. 21D provides a graphical representation of a heartbeat cycle with aortic blood flow measured against the synchronous opening and closing of a sleeve valve similarly shown in Figs. 21A-C.

Fig. 22 is a heat transfer catheter with a plurality of heat transfer regions that may be configured for placement in the aortic region.

Fig. 23A is a simplified perspective drawing of a version of the heat exchange catheter of the invention having an entry for cooled blood into a central lumen, the distal end of the central lumen inserted into the coronary ostium.

Fig. 23B is a cross-sectional view of Fig. 29 taken along lines B-B.

Fig. 24A is a simplified perspective view of a finned thermal balloon catheter, the fins being inflatable balloon lobes.

Fig. 24B is a simplified cross-sectional view taken along the line B-B in Fig. 24A.

5 Fig. 24C is a simplified cross-sectional view taken along the line C-C in Fig. 24A.

Fig. 24D is a simplified cross-sectional view taken along the line D-D in Fig. 24A.

10 Fig. 24E is a simplified cross-sectional view taken along the line E-E in Fig. 24A.

Fig. 24F is a simplified cross-sectional view taken along the line F-F in Fig. 24A.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides methods and apparatus for selectively controlling regional and whole body temperature by warming or cooling a body fluid such as blood in situ and directing the warmed or cooled body fluid to a desired location. According to the present invention, a catheter having a heat exchanger which may be, for example, a balloon with fins, is inserted into a fluid containing portion of the patients body, for example, a blood vessel. A blood channeling sleeve is mounted over the heat exchanger and is open at both its proximal end (closest to the insertion point) and its distal end (farthest along the catheter from the insertion point). The distal end of the sleeve is placed so that fluid such as blood that enters the proximal end of the sleeve flows in heat transfer proximity past the heat exchanger. Heat exchange proximity requires sufficient proximity for effective heat exchange to occur and depends on such factors as the chemical and physical make-up of the blood, the rate of flow past the heat exchange surface, the pattern of blood flow past the heat exchanger, (laminar flow, turbulent flow, and the like), the difference in temperature between the heat exchange surface and the blood, the material of which the heat exchange surface is made, and the proximity between the heat exchange surface and the blood. Fluid exits the distal end of the sleeve so that the heated or cooled blood is discharged in a desired location, for example upstream of target tissue such as the brain. By continuing to heat or cool fluid flowing to the target tissue for a sufficient length of time, the temperature of the target tissue is altered.

Likewise, when inducing hypothermia or hyperthermia, the invention provides for heating or cooling the target tissue to the desired temperature and

maintaining that temperature by controlling the heat exchange catheter.

Similarly, different regions may be controllably maintained at temperatures different from each other by controlling different heat exchange catheters at different locations with the patient's body. Additionally, the temperature of the target tissue may be maintained at a desired temperature, for example, mildly hypothermic, while the core temperature of the body may be monitored and maintained at a different temperature, for example, normothermic (37°C) or nearly normothermic, by use of a separate heat exchange catheter or an additional heat exchange region located on the same heat exchange catheter.

Fig. 1 depicts a distal portion 15 of a heat exchange catheter 10. The catheter may be inserted through the patient's skin into a blood vessel BV. Blood flow through the vessel is indicated in Fig. 1 by a set of flow arrows F. The catheter may be inserted into a relatively large blood vessel, e.g., a femoral artery or vein, a jugular vein, since these vessels provide numerous advantages in that they are readily accessible, provide safe and convenient insertion sites, and have relatively large volumes of blood flowing through them. In general, large blood flow rates facilitate quicker heat transfer into or out of the patient. For example, the jugular vein may have a diameter of about 22 French, or a bit more than 7 millimeters (1 French = 1mm/ π). A catheter suitable for insertion into a vessel of this size can be made quite large relative to catheters intended for insertion into other regions of the vascular system. Atherectomy or balloon angioplasty catheters are sometimes used to clear blockages from the coronary artery and similar vessels. These catheters commonly have external diameters in the range between 2 and 8 French. However, a catheter formed in accordance with this aspect of the invention may have an external diameter of about 10

French or more, although this dimension may obviously be varied a great deal without departing from the basic principles of the invention.

The catheter may be small enough so that the puncture site can be entered using the percutaneous Seldinger technique, a technique well known to medical practitioners. To avoid vessel trauma, the catheter will usually be less than 12 French in diameter upon insertion. Once in the vessel however, the distal or working end of the catheter can be expanded to any size so long as blood flow is not unduly impeded. Additionally, the femoral artery and vein and the jugular vein are relatively long and straight blood vessels. This will allow for the convenient insertion of a catheter having a temperature controlled region of considerable length. This is of course advantageous in that more heat may be transferred at a given temperature for a catheter of a given diameter if the length of the heat transfer region is increased. Techniques for inserting catheters into the above mentioned blood vessels are well known among medical personnel. Although the method of the present invention will probably be most commonly employed in a hospital, the procedure need not be performed in an operating room. The apparatus and procedure are so simple that the catheter may be inserted and treatment may begin in some cases even in an ambulance or in the field.

Fig. 2 depicts still another means for transferring heat to or from the distal end of a catheter. In this embodiment, catheter shaft 20 has two lumens running through it. Fluid flows from the proximal end of the catheter through in-flow lumen 60, through a heat transfer region 62, and back out through out-flow lumen 64. By supplying either warmed or cooled fluid through inflow lumen 60, heat may be transferred either to or from the patient's blood stream

which flows in heat transfer proximity to the heat transfer region. The heat transfer region 62 may be in the form of a balloon 70. Use of a balloon may be advantageous in some embodiments to provide an increased surface area through which heat transfer may take place. Balloon inflation is maintained by a pressure difference in the fluid as it flows through in-flow lumen 60 and out-flow lumen 64. The balloon should be inflated to a diameter somewhat less than that of the inside diameter of the blood vessel so as not to unduly impede the flow of blood through the vessel.

Fig. 3 depicts a catheter having an internal resistance heating element 28 and a balloon 70, which is shown inflated. The balloon surface may be provided with structures that increase the surface area available for heat transfer, i.e. fins. In this embodiment, the increased surface area provided by the inflated balloon is augmented by the presence of a set of longitudinal fins 75 on the surface of the balloon. As shown in Figs. 3 and 4A-C, longitudinal fins 75, radial ribs 77, or one or more spiral fins 79 may be disposed directly on the body 20 of a catheter. Longitudinal ribs may be advantageous because they tend to restrict blood flow through the vessel less than other configurations. In fact, these ribs insure that the balloon will not substantially block the flow of blood through the vessel because a flow path may be maintained between the ribs even when the balloon is inflated. Inclusion of a balloon on a catheter employing resistance heating allows for designs in which current is conducted through the fluid which fills the balloon.

A catheter according to the present invention may be designed and configured to optimize the rate of heat transfer between the catheter and blood flowing through the vessel. While a large surface area is desirable in order to

maximize heat transfer, the catheter should be appropriately configured and sized to minimize restriction to flow through a blood vessel. Furthermore, the temperature of the catheter should be carefully controlled to prevent undesirable chemical changes within the blood. This is especially important when applying heat to the blood as blood is readily denatured by even moderately high temperatures. The exterior temperature of a catheter for warming blood should generally not exceed about 42°C - 43°C. It is estimated that a catheter whose surface temperature is controlled between 37°C and 42°C will provide a body core warming rate of approximately one to two degrees Celsius per hour in a patient starting out with severe hypothermia. This estimate is highly dependent on a number of factors including the rate of blood flow through the vessel, the initial body temperature of the patient, the external surface area of the catheter through which heat is conducted, etc. The actual rate achieved may vary substantially from the above estimate. The above estimate provides a starting point for a rough estimate as to the level of power transferred from the catheter to the patient's body and therefore of the size of the power supply required by the system. Regardless of the exact means of power transmission chosen, resistance heating coil, laser and diffusing tip, direct conduction or fluid circulation, an appropriate power supply will be required to provide heat to or remove heat from the system.

The sum of heat entering and leaving a patient's body can be written as:

$$\Delta H = H_c + H_i - H_e$$

where ΔH is the sum of all heat transferred, H_c is the heat transferred from the catheter to the patient, H_i the heat produced by the patient internally, and H_e the heat lost from the patient to the environment. If one assumes, as will ordinarily

be the case in a healthy patient, that the body's internal thermoregulatory system will produce just enough heat to offset heat lost to the environment, then the equation is made simple:

$$\Delta H = H_c$$

- 5 The above equation can be written in terms of the change in the patient's internal body temperature over time as follows:

$$mc(\Delta T/\Delta t) = (\Delta H_c/\Delta t)$$

- where m is the body mass of the patient, c is the specific heat of the patient's body, $(\Delta T/\Delta t)$ is the time rate of change of the patient's internal body temperature, $(\Delta H_c/\Delta t)$ is the time rate of heat delivery from the catheter to the patient. If one assumes a patient having a body mass of 75 kilograms and a specific heat of 4186 joules/°C-kg (assumes the specific heat of the human body to be the same as that of water, the actual value will be somewhat different), then a warming rate of 1 °C per hour (3600 seconds) will require the catheter to
- 10 transfer heat to the patient at a rate of about 87 watts (1 watt = 1 joule/sec). However, as an estimate of the desirable size of a power supply to be used with a catheter of the present invention, this estimation may be too low. This may be true for a number of reasons. First, it was assumed for the sake of convenience that the patient's internal system would produce an amount of heat equal to that
- 20 lost to the environment. In a hypothermic patient this will obviously not be the case. Almost by definition, accidental hypothermia occurs when a person's ability to produce heat internally is overwhelmed by heat lost to the environment. The catheter will have to make up the difference so the power level required will need to be greater for that reason alone. Alternatively, to
- 25 induce hypothermia, sufficient heat will need to be removed from the blood to

lower the temperature of the target tissue, or in the case of whole body hypothermia, to remove more heat than is generated by the body. In removal of heat, the power required to cool the heat exchanger will be largely dependent on the efficiency of the cooling device including the dissipation of excess heat
5 from the device to the environment.

The above estimate does not allow for power losses between the power supply and whatever warming means is utilized. Such losses could include resistance losses in electrical transmission lines between the power supply and a resistance heating element, inherent inefficiencies and other losses in a system
10 having a laser and a diffusing tip, heat losses along a thermally conductive shaft or fluid circulation lumen, and the like. Any such losses which do occur will need to be compensated for by additional power supply capacity. Furthermore, it would be undesirable to limit the performance of a catheter according to the present invention by limiting the size of the power supply used. It would be
15 preferable instead to use a power supply capable of providing power considerably in excess of that actually needed and then controlling the delivery of that power according to the measured temperature of the catheter itself. As mentioned previously, this can be readily accomplished by including a sensitive temperature sensor within the body of the catheter. Nevertheless, the above
20 calculation can be used as a useful estimate of the likely lower bound for sizing a power supply for use in a catheter according to the present invention.

An alternative estimate can be made by comparing the likely performance of the various embodiments described herein with the power requirements for the external blood warming apparatus presently known. Such
25 external warming apparatus generally requires a supply of power on the order of

1000 - 1500 watts and sometimes more. A device formed in accordance with the present invention may require considerably less power than that. First, the present invention may not require an external pump to circulate the blood; this function is provided by the patient's own heart. Accordingly, no power is
5 needed to drive such a pump. Secondly, the present invention may be considerably less complicated than external blood warming systems. Known systems circulate the blood over a relatively lengthy path from the patient, through the warming element, and back into the patient. More heat may be lost over this lengthy path than in devices described herein. Thus, the power required by
10 external blood circulation and warming systems of the type previously known can be used as a rough estimate of the likely upper limit for power required by a system according to the present invention. It is most likely that such a system may be equipped with a power supply having a capacity somewhere between the two rough estimates described above. It is therefore contemplated that a
15 suitable power supply will be capable of providing peak power somewhere in the range between 100 and 1500 watts, probably being in the range between 300 and 1000 watts. The ranges specified are an estimate of suitable peak power capability. The power supply will most commonly be thermostatically controlled in response to a temperature sensor in the body of the catheter. The
20 actual effective power transmitted to the patient will therefore typically be much less than the peak power capacity of the system power supply.

The above calculations refer primarily to a system for heating the blood. With respect to a catheter for cooling the blood, the temperature and power constraints may not be as limiting. Care should be taken to avoid freezing the
25 blood or inducing shock to the patient from excessively rapid cooling. The

primary component of blood is essentially water with a number of suspended and dissolved substances. As such, its freezing point is somewhat below 0°C. However, a catheter adapted to cool blood in a hyperthermic patient or to induce an artificial hypothermia will usually not be operated at temperatures that low.

5 It is presently contemplated that the external surface of such a catheter may be held in the range between about 1°C and 20°C, although the actual temperature could vary between about 0°C and the patient's current body temperature. Additionally, for example, of the case of a heat exchange balloon of some length, the surface temperature of the balloon may vary along its length as it
10 gives off heat to the blood. A balloon may vary in temperature as much as 12°C or more along its length.

Another aspect of the present invention further provides methods for both raising the body temperature of initially hypothermic patients and lowering the body temperature of patients who are initially hyperthermic, or for whom
15 the body temperature is to be lowered below normal for some other purpose. In such cases, it is generally necessary to monitor the target tissue (which in whole body hypothermia may be the whole body and in regional may be, for example, the brain) and control the cooling so the desired temperature will not be exceeded for example, by the physiologic response of the patient. In such cases,
20 this aspect of the invention specifically provides for reversing the heat transfer process to maintain the target tissue at the selected temperature.

As set forth in Fig. 5, a sample control scheme is provided herein for either warming or cooling target tissue to a preferred temperature and maintaining the tissue at about the preferred temperature. The control scheme is
25 described by the flow chart shown in Fig. 5 and illustrated with the graph shown

in Fig. 6. A preferred temperature is pre-selected for the target temperature, for example a temperature of 31°C for the brain tissue. This pre-selected temperature is communicated to a control unit, for example by setting a desired temperature on a control unit for a heat exchange catheter. A heat exchange catheter capable of either removing heat from the blood or adding heat to the blood is inserted so that it is in heat exchange proximity with blood in a blood vessel that delivers blood to a target location such as the brain. The catheter is controlled by the control unit described above that may turn the heat exchanger off or on and may control the heat exchanger to heat or cool the blood which is in heat exchange proximity with the heat exchanger.

The temperature of the brain is monitored, for example by a temperature probe inserted into the brain tissue or by measuring temperature at some proxy location such as the tympanic membrane or nasal cavity provides a temperature measurement that represents the brain temperature. This results in a sensed temperature measurement that is communicated to the controller. An upper variance set point is determined, for example ½ degree above the pre-selected temperature, and communicated to the controller. In this example, that would result in an upper variance set point of 31½°. A lower variance set point is also determined and communicated to the controller, for example ½ degree below the pre-selected temperature, resulting in this example in a lower variance set point of 30½°.

When the heat exchanger is cooling, the sensed temperature of the target tissue is compared with the pre-selected temperature. If the sensed temperature is above the pre-selected temperature, the cooling continues. If the sensed temperature falls to the pre-selected temperature or below, then the controller

acts to turn the heat exchanger off. After the heat exchanger is turned off, the temperature of the target tissue is again measured to obtain a sensed temperature. If the sensed temperature is above the upper variance set point, the controller acts to cause the heat exchanger to begin cooling again. This cooling
5 continues until the temperature again reaches the pre-selected temperature. At this point, the controller once again acts to turn the heat exchanger off. If the patient's body is generating heat in the target tissue at a rate greater than the loss to the environment, it may be seen that the temperature will oscillate between the preferred temperature and the upper variance set point, in this example,
10 between 31°C and 31½°C as illustrated by section A of Fig. 6.

In some instances, the temperature of the target tissue may continue to fall spontaneously after the heat exchanger is turned off, for example if the brain tissue is giving off more heat to the environment than is generated by the brain. In such a situation the sensed temperature may continue to fall until it is below
15 the lower variance set point. If it does, the controller acts to cause the heat exchanger to add heat to the blood and thus to the target tissue until the sensed temperature is again at the pre-selected temperature. The controller then turns the heat exchange catheter off. If the temperature again falls until it reaches a temperature below the lower variance set point, the process is repeated. If this
20 situation repeats, it may be seen that the temperature will oscillate between the pre-selected temperature and the lower variance set point, in this example, between 31°C and 30½°C as illustrated by section B of Fig. 6.

The example given here was for purposes of illustration only and many variations will be anticipated within the scope of this invention. For example,
25 the pre-selected temperature and upper and lower variance set points may be

different than those described above. The discussion above was an example of cooling the target tissue to a temperature below normothermic. However it may be seen that a pre-selected temperature above normothermic may also be selected, and a heat exchanger which is controlled to both add heat to the blood or remove heat from the blood may, through use of the same control scheme, maintain the temperature of the target tissue at the preferred temperature within the upper and lower variance set points around a pre-selected temperature above normothermic. It may also be readily perceived that a patient that is hypothermic may be rewarmed to normothermia by setting the preselected temperature in the control scheme illustrated to 37° which will cause the heating element to warm the blood until the sensed temperature reaches 37°. The anticipation and prevention of temperature overshoot may be accomplished as described in U.S. Patent Application No. 08/584,013 previously incorporated herein by reference.

In the example given, the steps are all stated as discrete actions, such as measuring the temperature of the target tissue or comparing sensed and pre-selected temperatures, but it may be readily understood by one of skill in the art that the actions may be relatively continuous. It will also be readily appreciated that control criteria other than the temperature of the target tissue may be substituted and controlled, for example blood pressure or cranial pressure, or temperature derived from some other location, and two control schemes as described may be simultaneously instituted for different locations in the patient, for example, to cool a region such as the brain and maintain that region in a relatively stable cooled condition while simultaneously warming the core temperature of the patient to normothermic and maintaining the patient's core

temperature relatively stable at a normothermic temperature. The method of affecting the target tissue's temperature discussed above was cooling the blood upstream from the target tissue, but it may be appreciated that other methods of heating and cooling, for example heating or cooling cerebrospinal fluid circulating around the brain or spinal cord may be employed.

A system for the selective warming and cooling of patients is illustrated in Fig. 7. The system may comprise a catheter 100 having a proximal end 102, a distal end 104, a heat-generating surface 106 near the distal end, and a heat-absorbing surface near the distal end 108. The heat-generating surface 106 may include any of the heat transfer components described above, particularly a wire coil resistance heater as shown having from 50 to 1000 windings, typically spaced-apart from 0.1 mm to 1 mm. The total length of the catheter may range from 15 cm to 50 cm, and may measure from about 1 mm to 5 mm in diameter. The windings may extend over a total distance in the range from 10 cm to 20 cm near the distal end. The heat-absorbing surface may be a thermally conductive metal foil, typically composed of a biologically compatible thermally conductive metal, such as gold, silver, aluminum, or the like. Copper may also be useful, but should be treated or encapsulated in order to enhance its biocompatibility. The metal foil may be thin in order to enhance flexibility of the catheter body, typically having a thickness in the range from 0.001 mm to 0.01 mm. The heat-absorbing surface 108 may be conductively coupled to a cooler located externally of the catheter, typically in a control unit 120 as described below. In the illustrated embodiment, the surface 108 is coupled by a thermally conductive core member 110 composed of a flexible rod or wire formed from one of the thermally conductive metals described above.

Alternatively, thermal coupling can be achieved by extending the surface 108 proximally so that the proximal end of the surface can be coupled to the cooler.

In the latter case, it may be preferable that the proximal portions of the surface 108 be thermally insulated to prevent cooling outside of the blood circulation.

- 5 The system may further comprise a control unit 120 which typically provides both the heat-generator and the cooler for coupling to the catheter 100. The heat-generator may also comprise a direct current source for coupling to the resistance heater on the catheter. Usually, the direct current source will be a commercially available, temperature-controlled DC power supply, typically
- 10 operating at a voltage in the range from 10 VDC to 60 VDC and a current output in the range from 1 A to 2.5 A. The power supply may be controlled to maintain the surface temperature of the heating surface 106 in the range from 40°C to 42°C. As discussed above, the surface temperature should not exceed 42°C in order to prevent damage to blood components. Other desirable
- 15 characteristics of the heat exchange surface are described above.

- Alternatively, the temperature of the heat exchange surface can also be controlled based on measured blood temperature and/or measured body temperature. Blood temperature can be measured by temperature sensors present on the catheter. For example, a temperature sensor 112 may be located
- 20 on the catheter spaced-apart from the heat exchange surfaces 106 and 108. The temperature sensor 112 may be located either upstream or downstream from the heat exchange surfaces based on the direction of blood flow and depending on the manner in which the catheter is introduced to the patient. Optionally, a pair of temperature sensors could be provided, one disposed on each side of the heat
- 25 exchange surfaces in order to measure both upstream and downstream blood

temperatures. The catheter may also include a temperature sensor (not shown) coupled directly to the heat-generating surface 106 so that the temperature of the surface may be directly controlled. Other temperature sensors (not shown) may be provided for directly measuring the patient's core body temperature or the temperature of various regions of the patient's body, with the temperatures being fed back into the control unit 120. The cooler in control unit 120 may be any type of refrigeration unit capable of removing heat from the heat-absorbing surface 106 at a rate sufficient to cool the blood at a desired rate. Typically, the cooler may be rated at from 150 W to 350 W.

The cooler will be a thermoelectric cooler, such as those commercially available from Melcor Thermoelectrics, Trenton, New Jersey 08648. The cooler may be directly coupled to the core element 110 so that direct heat conduction from the heat-absorbing surface 108 may be effected to the cooler in control unit 120. The temperature of the cooling surface 108 may be less critical than that of the heating surface 106 with regard to this aspect of the invention, but will usually be maintained in the range from 0°C to 35°C preferably being below 30°C. The temperature of the cooling surface may be directly controlled within this range, or alternatively, the system may be designed so that the cooling temperature operates approximately within this range based on the total system characteristics.

The control unit 120 may further include one or more temperature controllers for controlling the temperature of the heat-generating surface 106 and the heat-absorbing surface 106 based on the blood temperature and/or the body temperature. At a minimum, the control unit 120 may control the temperature of the heat-generating surface 106 within the range set forth above,

and may monitor at least one of the patient blood temperature and patient body temperature in order to reverse the heating or cooling mode as discussed above.

With respect to the control scheme described in Fig. 10, for example, the system may operate in an on-off mode where for example hypothermic patients are

5 initially treated by warming the blood at a constant surface temperature rate until a target temperature is reached. When the target temperature is reached, power to the heat-generating surface 106 is turned off. Monitoring of the blood and/or patient body temperature, however, is maintained to assure that the patient temperature does not exceed a maximum which is above the target

10 temperature. Should the maximum be exceeded, then the system is operated in the cooling mode until the excess body temperature is lowered. Usually, there will be no need to again warm the patient, but the present system may provide for further cycles of warming and cooling if necessary. For initially

hyperthermic patients, the cooling and warming modes are reversed. It will be appreciated that the temperature control schemes of the present invention could be substantially more sophisticated. For example, the power input to warm the patient could be controlled based on proportional, derivative, or integral control schemes which will typically provide for a tapering of the heat transfer rate as the patient's core or regional body temperature approaches the desired target

20 level. Moreover, cascade control schemes based on both patient blood temperature and patient body temperature could be devised. Such control schemes, for example, could be adapted both for warming the patient and cooling the patient with mathematical models of typical patient physiological characteristics being taken into account in preparing the control schemes.

25 However, a simple off-on control scheme that is capable of reversing the heat

transfer mode if the target temperature is exceeded by more than a safe amount will be sufficient.

Another aspect of the invention provides methods and apparatus for regulating the temperature of a fluid that is to be delivered to a target location within a patient while the fluid is within the body. The regulation of the fluid temperature in this manner lends itself to a variety of applications including heating or cooling the temperature of drugs, solutes, or blood before their delivery to a target site. Regulation of the temperature of the injected fluid may also find use in regulating the temperature of the target location itself in preparation for various medical procedures, including neurosurgical procedures within the brain. Further, the methods and apparatus allow for the temperature of tissue within a patient's body temperature to be controlled by warming or cooling the patient's blood in situ. By warming or cooling the patient's blood that subsequently flows to that tissue, the temperature of the tissue in question may thereby be increased or decreased as desired. Such methods and apparatus therefore provide a convenient therapy for treating hypothermia or hyperthermia, or for inducing regional cooling or heating.

Fig. 8 depicts a distal end 210 of a catheter 212 formed in accordance with another aspect of the present invention. The catheter 212 may be positioned within a blood vessel BV. Blood flow through the vessel is indicated in Fig. 8 by a set of arrows F. The distal end 210 of the catheter 212 may include a temperature altering region 214 although it will be appreciated that the temperature altering region may be located anywhere between the proximal and the distal catheter end. Techniques for inserting catheters into various blood vessels such as the Seldinger technique mentioned above, are well known

among medical personnel. The catheter 212 may be manufactured in various sizes depending upon the particular application. For most uses, it may have a length in the range from about 30 cm to about 130 cm, and a diameter in the range from 6 to 12 French (1 French = 0.33 mm). The catheter 212 will

5 preferably be flexible to allow the catheter to be moved through various vessels within a patient, and may be positioned in the body preferably with the assistance of a guidewire.

As shown in Fig. 9, the catheter 212 may include an internal lumen 216. A temperature altering mechanism 218 may be provided adjacent the luminal wall of the lumen 216 at the temperature altering region 214. For convenience of discussion, the temperature altering mechanism 218 is illustrated schematically and may comprise a variety of mechanisms that are employed to either heat or cool the luminal wall of the lumen 216 to heat or cool the fluid passing through the lumen 216 at the temperature altering region 214.

10 Exemplary mechanisms for heating or cooling the luminal wall may include heated or cooled fluids passing through the catheter 212 near the luminal wall, resistive elements disposed within the catheter 212, laser energy that is supplied to the temperature altering region, various chemicals disposed within the catheter body, thermoelectric crystal, and the like. Use of such mechanisms

20 allow fluids passing through the lumen 216 at the temperature altering region 214 to have their temperature altered so that they will be within a desired range when exiting the catheter 212. The temperature altering mechanism 218 may be configured to heat a fluid passing through the temperature altering region so that its temperature will be heated by at least 5°C to about 42°C. When cooling a

25 fluid, the temperature altering mechanism 218 may be configured to cool the

fluid by at least 7°C to about 30°C. The temperature altering mechanism 218 may be designed to optimize the rate of heat transfer between the catheter and a fluid flowing through the internal lumen. Further, the temperature of the catheter may be carefully controlled to prevent undesirable chemical changes within the blood. This is especially important when applying heat to the blood as blood is readily denatured by even moderately high temperatures. The temperature of the luminal wall for warming blood should generally not exceed about 42°C to 43°C. The amount of energy that may be supplied to heat a patient's core body temperature is described in U.S. Patent No. 5,486,208, previously incorporated by reference herein. The temperature altering mechanism 218 may be also arranged within the catheter 212 so that the temperature of the luminal wall may be heated or cooled without substantial direct heating of an outer surface of the catheter. In this way, the catheter 212 may be employed to selectively heat or cool a specific target site by simply positioning the distal end of the catheter at the target site and introducing a fluid through the lumen 216.

As shown in Figs. 9 and 10, a catheter 220 formed in accordance with this aspect of the invention may circulate a heat transfer fluid to alter the temperature of a fluid passing through the catheter. The catheter 220 comprises a catheter body 222 having a proximal end 224 and a distal end 226. A lumen 228 extends between the proximal end 224 and the distal end 226. At the proximal end 224, is a proximal port 230 through which various fluids may be introduced into the lumen 228 from outside of a patient. Passing through the catheter body 222 is a first fluid path 232 and a second fluid path 234 as particularly shown in Fig. 10. A first port 236 is in communication with the

first fluid path 232 and a second port 238 is in communication with the second fluid path 234. In this manner, a heated or cooled heat transfer fluid may be introduced into the first port 236 where it passes through the first fluid path 232 adjacent to the lumen 228. As the heat transfer fluid passes through the first fluid path 232, heat is transferred either to or from a fluid passing through the lumen 228 to heat or cool the fluid to a desired temperature before exiting the catheter body 222. After passing through the first fluid path 232, the heat transfer fluid circulates back through catheter body 222 through the second fluid path 234 where it exits the second port 238.

Figs. 11 and 11A provide illustrations of yet another variation of the invention that includes a catheter 240 with resistive heating to heat a fluid passing through the catheter. The catheter 240 comprises a catheter body 242 having a proximal end 244 and a distal end 246. A lumen 248 passes through the catheter body 242 between its proximal end 244 and distal end 246. A proximal port 250 is provided to facilitate the introduction of fluids into the lumen 248 from outside a patient. Disposed within the catheter body 242 near the lumen 248 are a plurality of wires 252 as shown in Fig. 17. These wires 252 may exit the catheter body 242 through a port 254. The wires 252 may be also connected to either a DC or low frequency AC power supply. As electrical current passes through the wires 252, some of the energy is dissipated as heat to heat the luminal wall. Alternatively, a radio frequency or RF power supply may be employed to supply power to electrodes disposed within the catheter body 242 to heat the luminal wall.

Referring now to Figs. 12-14, a catheter 256 may be employed to heat or cool an externally injected fluid, to heat or cool a body fluid in situ, or a

combination of both. The catheter 256 may comprise a catheter body 258 having a proximal end 260 and a distal end 262. Extending between the proximal end 260 and the distal end 262 is a lumen 264 as shown in Fig. 12. A proximal port 266 is also provided at the proximal end 260 to allow various fluids to be injected into the lumen 264 while port 266 is positioned outside a patient. At the distal end 262 is a temperature altering region 268 which includes a temperature altering mechanism (not shown). The particular temperature altering mechanism may comprise any of those described with respect to other aspects of the invention set forth above or hereafter. In this manner, a fluid which is injected into the port 266 will pass through the lumen 264 and have its temperature altered when passing through the temperature altering region 268 in a manner similar to that previously described with other embodiments. The catheter body 258 may include a plurality of perfusion orifices 270 which extend through the wall of the catheter body to provide fluid paths to the lumen 264. As shown by the arrows in Fig. 12, a body fluid, such as blood, may pass through the orifices 270 and into the lumen 264 where it will have its temperature altered at the temperature altering region 268 so that the temperature of the body fluid will be within a desired range when exiting the catheter body 258 at its distal end 262 as shown.

As illustrated in Figs. 13 and 14, the luminal wall of the catheter body 258 may include a plurality of flaps 272. These flaps 272 may control the passage of body fluids through the orifices 270 and into the lumen 264. These flaps 272 or similar structures may be also constructed as described in U.S. Patent No. 5,180,364, the disclosure of which is herein incorporated by reference. When a fluid is injected into the lumen 264 at the port 266, the

pressure and direction of flow of the injected fluid will cause the flaps 272 to close over the orifices 270 as shown in Fig. 13 so that essentially only the injected fluid will pass through the temperature altering region 268. In this way, the temperature of the injected fluid will have its temperature altered so

5 that it will be within a desired range when exiting the distal end. As shown in Fig. 14, when no fluids are injected into the port 266, the pressure of the body fluid within a vessel will cause the flaps 272 to open to allow the body fluids to flow through the orifices 270 and into the lumen 264. In this manner, a body fluid, such as blood, may have its temperature altered by passing through the

10 orifices 270 and through the temperature altering region 268. The configuration of the flaps 272 is particularly advantageous in applications where the temperature of a patient's tissue is altered. By simply introducing the catheter 256 into the patient, the blood which flows into the lumen 264 via the orifices 270 will have its temperature altered by the time it exits the distal end 262. This

15 may result in whole body temperature alteration, or if the blood is directed to a specific site by the catheter, may result in regional temperature alteration. In the event that a solute or drug is also needed for therapy, it may be introduced into the lumen 264 through the port 266 and have its temperature be substantially the same as the exiting blood temperature. As described above, this aspect of the

20 invention provides methods and apparatus which are useful in regulating the temperature of various fluids while such fluids are within a patient. With such an arrangement, a variety of procedures may be performed including the introduction of a drug or solute from outside the patient that may have its temperature altered within the catheter before reaching a target location.

25 Furthermore, a fluid may be heated or cooled within the catheter to in turn heat

or cool a specific region of a body structure prior to the performance of a medical procedure. In another alternative, the temperature of a patient's body fluid, such as blood, may be altered in situ to treat a patient suffering from either hypothermia or hyperthermia, or to intentionally induce either whole
5 body or regional hypothermia.

Another aspect of the present invention provides methods and apparatus for regional and whole body temperature modification. The lowering of body temperature for selected regions may provide a neuroprotective effect particularly in proximity to the brain. Selected portions of at least one catheter
10 may, for example, cool fluids such as blood or cerebral spinal fluid that are in contact with, circulating in, around, or leading to the brain region. The cooled body fluid may be selectively directed to a chosen region of the patient's body for producing a regionally confined cooling effect. Alternatively, a patient's whole body temperature may be reduced to provide, for example,
15 neuroprotection for the entire brain and other widely spaced tissue such as the spinal cord. As will be discussed in further detail below, methods and apparatus provided herein may include a heat exchange catheter formed with an increased surface area or a finned section to provide rapid and effective heat transfer. A regionally confined thermal transfer region along a catheter body having a
20 longitudinal dimension may further provide effective heat transfer with fluids traveling within an inner passageway, while the catheter may further provide a zone of regional cooling or heat transfer along selected portions of the catheter. Various combinations of both heating and cooling elements may be defined along different portions of a single catheter, or as part of a series or combination
25 of heat exchange devices as similarly described with respect to other aspects of

the invention. All of these devices and procedures may be directed to regional or selected body temperature modification that is particularly suitable for the cooling of the cerebral region, and for inducing an artificial state of hypothermia that may provide therapeutic benefits in the treatment of cerebrovascular injury.

- 5 The system may be a simple heat transfer catheter with manual controls, or may be operated by means of a controller that may monitor a number of sensors and control the heat exchange catheter in response to data received from said sensors.

- As generally shown in Fig. 15, a heat transfer catheter system directed to this aspect of the invention may include a catheter control unit 300 and a heat transfer catheter 302 formed with a combination of at least one heat transfer section. The heat transfer section or sections are located on that portion of the catheter, as illustrated by section 319, that is inserted into the patient. This insertion portion is less than the full length of the catheter and extends from the location on the catheter just inside the patient, when the catheter is fully inserted, to the distal end of the catheter. The catheter control unit 300 may include a fluid pump for circulating a heat exchange fluid or medium within the catheter 302, and a combination of at least one heat exchanger component for heating and/or cooling circulating fluids within the heat transfer system. A reservoir or fluid bag 306 may be connected to the control unit 300 to provide a source of heat transfer fluid such as, saline, blood substitute solution or other biocompatible fluid. The control unit 300 may further receive data from a variety of sensors which may be, for example, solid state thermocouples to provide feedback and patient temperature information from selected organs or portions of the body such as a temperature probes for the brain and head region
- 10
15
20
25

308, a rectal temperature probe 309, an ear temperature probe 311, a bladder temperature probe (not shown) and the like. Based upon sensed temperatures and conditions, the control unit 300 may direct the heating or cooling of the catheter in response to input from the sensors. The control unit 300 may

5 activate a heat exchanger at a first sensed temperature, and may also deactivate the heat exchanger at a second sensed temperature which may be relatively higher or lower than the first sensed temperature or any other predetermined temperature. The control unit 300 may of course independently heat or cool selected heat transfer sections to attain desired or preselected temperatures in

10 body regions. Likewise the controller may activate more than one heat exchanger to control temperature at particular regions of the patient's body. The controller might also activate or deactivate other apparatus, for example, external heating blankets or the like, in response to sensed temperatures. The controller may function as described above and illustrated in Figs. 5 and 6.

15 The temperature regulating catheter 302 illustrated in Fig. 15 may also provide various zones of cooling and/or heating by circulating heat transfer medium through a series of inlet and an outlet conduits. A first and a second fluid path 312 and 314 may provide a heat exchanger channel within the catheter, and may be respectively connected to the inlet 316 and outlet 317 of a

20 pump for circulation of a heat transfer fluid to cool the flow of fluid within a selected body region. A similar arrangement may be implemented for heating a selected body region simultaneously or independently from the cooling component of the system. The catheter control unit 300 may further include a thermoelectric cooler and heater which are selectively activated and deactivated

25 to perform both heating and cooling functions with the same or different heat

transfer medium within the closed-loop catheter system. For example, a first heat transfer section 318 of at least one temperature regulating catheter 302 and located on the insertion portion 319 of that catheter, may circulate a cold solution in the immediate head region, or alternatively, within a carotid artery or other blood vessel leading to the brain. The head temperature may be locally monitored with temperature sensors 308 positioned on a relatively proximate exterior surface of the patient or within selected body regions. Another or a second heat transfer section 320 of the catheter 302, also located on the insertion portion 319, may circulate a heated solution within a collapsible balloon or otherwise provide heat to other body locations through heating elements other mechanisms described in accordance with other aspects of the invention. While the heat transfer catheter 302 may provide regional hypothermia to the brain region for neuroprotective benefits, other parts of the body may be kept relatively warm so that adverse side effects such as shivering may be avoided or minimized. Warming of the body generally below the neck may be further achieved by insulating or wrapping the relatively lower body in a heating pad or blanket 322 while the head region 310 above the neck is cooled. It should be understood of course that multiple heat transfer sections of the catheter 302 may be modified to provide whole body cooling or warming to affect body core temperature, and is not just limited to regional or localized body temperature regulation.

Fig.16 provides an illustration of the heat transfer catheter system of the invention which includes disposable components including a heat transfer catheter 324, a disposable heat exchange plate 338, a pump head assembly 340, a saline bag 339, sensors 348, 344 and a fluid flow line 337, as well as reusable

components including a solid state thermoelectric heater/cooler 342, a pump driver 343 and various controls for the unit.

5 The heat transfer catheter 324 is formed with a blood channeling sleeve 325, a catheter shaft 326, and a heat exchanger 327 which may be for example a heat exchange balloon operated using closed-loop flow of heat exchange medium. The catheter shaft may be formed with a working lumen 328 for injection of drugs, fluoroscopic dye, or the like, and for receipt of a guide wire 329 for use in placing the heat transfer catheter at an appropriate location in the patient's body. The proximal end of the shaft may be connected 10 to a multi-arm adapter 330 for providing separate access to various channels in the catheter shaft. For example, one arm 336 may provide access to the central lumen 328 of the catheter shaft for insertion of a guide wire 329 to steer the heat transfer catheter to the desired location. Where the heat exchanger 327 is a heat exchange balloon for closed-loop flow of a heat exchange medium 331, the 15 adapter may contain an arm 332 to connect an inlet flow line 333 to an inlet flow channel (not shown in this Fig.) within the catheter shaft, a separate arm 334 to connect an outlet fluid line 335 to an outlet flow channel (also not shown in this Fig.) A dual channel flow line 337 may contain both inlet and outlet flow lines 333, 335 to connect the catheter shaft 326 to a disposable heat 20 exchange plate 338. Additionally, one of the flow lines, for example the inlet flow line 333 may be connected to a bag 339 of heat exchange fluid 331 to prime the closed-loop heat exchange balloon catheter system as necessary.

The heat exchange plate 338 may include a serpentine pathway 339 for the heat exchange fluid to be pumped through the heat exchange plate by means 25 of a disposable pump head 340. The heat exchange plate including the

serpentine pathway and the pump head is configured to install into a reusable master control unit 341. The master control unit may include a heat generating or removing unit 342 such as a thermoelectric heater/cooler (TE cooler). A TE cooler is particularly advantageous because the same unit is capable of either
5 generating heat or removing heat by changing the polarity of current activating the unit. Therefore it may be conveniently controlled to supply or remove heat from the system without the need of two separate units.

The master control unit includes a pump drive 343 that activates the pump head 340 to pump the heat exchange fluid 331 and cause it to circulate
10 through the heat exchanger 327 and the serpentine path in the heat exchange plate. When installed, the heat exchange plate is in thermal communication with the TE cooler, and thus the TE cooler may act to heat or cool the heat exchange fluid as that fluid is circulated through the serpentine pathway. When the heat exchange fluid is circulated through the heat exchanger located in a
15 patient's body, it may act to add or remove heat from the body. In this way the TE cooler may act to affect the blood temperature of a patient as desired.

The TE cooler and the pump are responsive to a controller unit 344. The control unit receives data input through electrical connections 345, 346, 347 to numerous sensors, for example body temperature sensors 348, 349 that may
20 sense temperatures from a patient's ear, brain region, bladder, rectum, esophagus or other appropriate location as desired by the operator who places the sensors. Likewise, a sensor 350 may monitor the temperature of the heat exchange balloon, and other sensors (not shown) may be provided as desired to monitor the blood temperature at the distal tip of the catheter, at the proximal tip
25 of the catheter, or other desired location.

An operator by means of the manual input unit 351 may provide the operating parameters of the control system, for example a pre-selected temperature for the brain. The parameters are communicated to the control unit 344 by means of a connection 353 between the manual input unit and the control unit.

In practice, the operator using the manual input unit supplies a set of parameters to the control unit 344. For example, a desired temperature for the brain region and/or the whole body of the patient may be specified as the pre-selected temperature. Data is received from the sensors 348, 349 indicating for example, a sensed temperature of the patient at the location of the sensors, e.g. the actual core body temperature of the patient or the actual temperature of the brain region. Other data input may include the actual temperature of the heat exchanger, the temperature of blood at the distal end of the catheter body, or the like.

The control unit coordinates the data and selectively actuates the various units of the system to achieve and maintain parameters. For example, it may actuate the TE cooler to increase the amount of heat it is removing if the actual temperature is above the specified temperature, or decreasing the amount of heat being removed if the temperature is below the specified temperature. It may stop the pumping of the heat exchange fluid when the body or regional temperature sensed is the desired temperature.

The controller may have a buffer range for operation wherein a target temperature is established, and an upper variance set point temperature and lower variance set point temperature are also set. In this way, the controller may cause the heat exchanger to operate until the target temperature is reached.

At that temperature, the controller may suspend the operation of the heat exchanger until either the upper variance set point temperature is sensed or the lower variance set point temperature is reached. When the upper variance set point temperature is sensed, the controller would then activate the heat exchanger to remove heat from the blood stream. On the other hand, if the lower variance set point temperature is sensed, then the controller would activate the heat exchanger to add heat to the blood stream. This control scheme is similar to that illustrated in Figs. 5 and 6 discussed above. Such a control scheme as applied to this system has the advantage of allowing the operator to essentially dial in a desired temperature and the system will act to reach that target temperature and maintain the patient at that target temperature. At the same time, a buffer range is established so that when the target temperature is reached, the controller will generally not turn the TE cooler on and off or activate and deactivate the pump drive in rapid succession, actions that would be potentially damaging to the electric units in question.

It may also be perceived, in keeping with the present invention, that the controller may be configured to simultaneously respond to several sensors, or to activate or deactivate various components such as several heat exchangers. In this way, for example, a controller might heat blood that is subsequently circulated to the core body in response to a sensed core body temperature that is below the target temperature, and simultaneously activate a second heat exchanger to cool blood that is directed to the brain region in response to a sensed brain temperature that is above the target temperature. It may be that the sensed body temperature is at the target temperature and thus the heat exchanger that is in contact with blood circulating to the core body may be turned off by

the controller, while at the same time the controller continues to activate the heat exchanger to cool blood that is directed to the brain region. Any of the many control schemes that may be anticipated by an operator and programmed into the control unit are contemplated by this invention.

5 An advantage of the system as illustrated is that all the portions of the system that are in contact with the patient are disposable, but substantial and relatively expensive portions of the system are reusable. Thus the catheter, the flow path for sterile heat exchange fluid, the sterile heat exchange fluid itself, and the pump head are all disposable. Even if a rupture in the heat exchange
10 balloon permits the heat exchange fluid channels and thus the pump head to come in contact with a patient's blood, no cross-contamination will occur between patients because all those elements are disposable. The pump drive, the electronic control mechanisms, the TE cooler, and the manual input unit, however, are all reusable for economy and convenience. Likewise, the sensors
15 may be disposable, but the control unit to which they attach is reusable.

 It will readily be appreciated by those of skill in the art that the system described here in detail may be employed using numerous substitutions, deletions and alternatives without deviating from the spirit of the invention as herein claimed. For example, but not by way of limitation, the serpentine
20 pathway may be a coil or other suitable configuration, the sensors may sense a wide variety of body locations and other parameters may be provided to the control unit, such as temperature or pressure, the heat exchanger may be any appropriate type, such as a thermal electric heating unit which would not require the circulation of heat exchange fluid. If a heat exchange balloon is provided, a
25 pump might be provided that is a screw pump, a gear pump diaphragm pump, a

peristaltic roller pump, or any other suitable means for pumping the heat exchange fluid. All of these and other substitutions obvious to those of skill in the art are contemplated by this invention.

Figs. 17A-E provide illustrations an embodiment of a heat exchanger of the invention. As shown in Fig. 17A, a heat exchange balloon catheter 360 with a finned balloon portion 362 may be positioned within at least a portion of the descending aorta 364 and a blood vessel 366 conducting blood flow to the brain region. It should be understood that the balloon portion 362 may be formed of material that is sufficiently thin to promote effective thermal transfer between heat exchange fluid within the balloon and blood flowing within heat exchange proximity of the balloon, but not excessively elastic to expand and unintentionally obstruct a fluid passageway or blood vessel 366. Indeed, the use of thin, strong but relatively inelastic material such as PET is desirable to obtain a predictable balloon configuration with adequate heat exchange properties.

The catheter shaft 368 of the thermal catheter 360 provided herein may be placed in a desired location relative to a selected body region or artery 366 by conventional techniques such as guiding catheters or steerable wire over-the-wire technique as known to those of ordinary skill in the field. The balloon portion 362 of the catheter 360 may support the closed-loop circulation of a heat transfer fluid as described herein. The increased surface area may provide effective heat transfer within a body region by thermal conduction, and may further permit blood continued blood flow without substantial disruption by creating channels exterior of the balloon surface when the balloon is expanded.

Fig. 17B illustrates a heat exchange balloon 360 mounted on a shaft 368 defined by a longitudinal axis and a plurality of heat transfer fins 369, 371, 373,

375 projecting radially outward from the longitudinal axis 370 of the catheter shaft. The heat transfer fins may be formed, for example, as the lobes of a multi-lobed, collapsible balloon. The shaft 368 is generally round and in this embodiment includes a working lumen 370 running through the shaft and open
5 at the distal end of the catheter. The working lumen may be used for the injection of medicaments which may include, for example, a thrombolytic agent, an anticoagulant, a neuro-protectant, a barbiturate, a anti-seizure agent, an oxygenated perfusate, a vaso-dilator, an agent which prevents vaso-spasm, an agent to prevent platelet activation, and an agent to deter the adhesion of
10 platelets. Alternatively, the working lumen may be used for the injection of fluoroscopic dye, for the receipt of a guide wire 329, or as a guiding catheter for various diagnostic or therapeutic devices including, for example, an angioplasty catheter, an embolectomy catheter, an occlusion member delivering catheter, an embolization member delivering catheter, an electro-cautery device, or a
15 microcatheter. The shaft exterior of the central lumen is divided by a web 372 into two channels, an inlet channel 374 and an outlet channel 376. The shaft has inlet orifices 377, 378, 379 communicating between the inlet channel and the interior of the balloon at the distal portion of the balloon. The shaft also has outlet orifices 380, 381, 382 communicating between the interior of the balloon
20 and the outlet channel. A plug 384 is inserted in the outlet channel between the inlet and the outlet orifices. The web 372 may be removed from the shaft between the plug and the inlet orifices to reduce resistance to flow of the heat exchange fluid in this portion of the shaft. Alternatively, in an embodiment not illustrated here, a tube with an open round lumen may be spliced between the

plug in the outlet channel and the inlet orifices to provide a channel under the balloon for relatively unobstructed flow of the heat exchange fluid.

The balloon may be made of, for example, a single sheet of collapsible thin plastic material 285 sufficiently thin to allow for effective thermal
5 exchange between a heat exchange fluid on the interior of the balloon and blood flowing over the exterior of the balloon. Tacking the material to the shaft as shown at 286 may form lobes of the balloon. Tacking the sheet of plastic to itself in appropriate locations as shown at 287 and 288 may further shape the lobes. The lobed shape of the balloon surface provides for significant surface
10 for heat exchange while providing for continued flow past the balloon through the space between the lobes of the balloon.

In use, heat exchange fluid (not shown) may be pumped under mild pressure into the inlet channel 374. The heat exchange fluid may be, for example, sterile saline or other biocompatible fluid with appropriate heat
15 transfer characteristics. The heat exchange fluid flows down the inlet channel until it reaches the inlet orifices 377, 378, 379 at the distal end of the balloon. The fluid flows from the inlet channel into the interior of the balloon. It then flows in a proximal direction through the interior of the balloon until it reaches the outlet orifices 380, 381, 382 at the proximal end of the balloon. The heat
20 exchange fluid then flows from the interior of the balloon through the outlet orifices and into the outlet channel 376 where it then flows back down the shaft and out of the body.

In the manner described above, a heat exchange fluid may be circulated through the balloon and either give off heat if the fluid is hotter than the blood

flowing past the balloon, or absorb heat from the heat exchange fluid is cooler than the blood.

Figs. 18A-E provide illustrations of another variation of the invention heat exchange catheter 390 formed with a sleeve having an inner fluid passageway 392 that provides regionally confined thermal transfer. The heat transfer catheter 390 may comprise a blood channeling sleeve 394 for placement within a fluid-containing body region, the sleeve defined by a proximal region 396 and a distal region 398 formed with an inner fluid passageway 392 defined by at least one relatively proximal opening 395 and at least one relatively distal opening 399 each in communication with the fluid-containing body region for directing the flow of fluid within the catheter body 394. A heat exchanger is internally positioned within at least a portion the sleeve for regionally confined heat transfer with fluid within the inner fluid passageway 392 of the blood channeling sleeve. In Figs. 18A-E the heat exchanger illustrated is a fluted closed-loop exchanger positioned around the circumference of the interior passageway 392 for circulation of heat exchange fluid as described in greater detail below.

As shown in Fig. 18A, the temperature regulating catheter 390 may be positioned within at least a portion of the aorta 364 and a blood vessel 399 branching off the aorta to direct blood to the brain region. The catheter is positioned in the innominate artery, but could equally be positioned, for example, with its distal portion in the right common carotid artery, the left common carotid, the right internal carotid and the left internal carotid among other locations. Blood may therefore be directed into the brain region while passing the heat exchanger positioned within the inner fluid passageway 392 of

the catheter body 394. When the heat exchanger is configured for cooling blood flowing through the inner passageway 392 and the catheter is positioned as shown in Fig. 24A, localized hypothermia of the brain region may be effectively achieved. The temperature regulating catheter 390 may be also selected for applicable methods for controlling the temperature of other selected fluid-containing body regions, for example, where the catheter is positioned to selectively direct blood to those regions.

As illustrated in greater detail in Figs 18 B-G, the catheter may be formed with a proximal shaft 400, the proximal shaft having a central working lumen and two arc-shaped lumens in side-by side configuration. The two lumens comprise an inlet lumen 402 and an outlet lumen 403. The blood channeling sleeve is attached to the proximal shaft at a proximal attachment region 404. The sleeve comprises a layer 405 of very thin material such as a PET sheet formed into a large tube-like configuration. The catheter shaft is positioned down the inside of the tube, and the sheet is attached along both the top 406 and the bottom 407 of the catheter shaft along the length of the sleeve. This creates two wing-like channels 408, 409 on each side of the catheter running the length of the sleeve that are the inlet and outlet channels respectively. The outer layer of the plastic sheet of each of these channels may be connected together at the top of the channels 410 to form the tube-like structure that forms the sleeve. In addition, the two layers of plastic sheet that form each channel may be connected together at various points or along lines 411 along the length of the sleeve to form pleats 412, and the inner layer 405 may be loose so that the channels will billow when inflated.

At the proximal end of the sleeve, just distal of the attachment region 404, an orifice 415 is formed between the inlet lumen 402 and the inlet channel of the catheter shaft 409, and similarly an orifice 416 is formed between the outlet lumen 403 and the outlet channel 408 of the sleeve. At the distal portion of the sleeve, the inlet 409 and outlet 408 channels between the plastic sheets are connected, so that there is a common space 413 shared by the two channels to allow fluid flowing down the inlet side to be removed through the outlet side as described in greater detail below. The catheter shaft under the sleeve may have reduced profile as illustrated in Fig. 18 B so that the sleeve formed of the thin plastic sheets may be folded down onto the catheter shaft and have a suitably low profile.

As an alternative method of construction, two tubes may be used to create the sleeve. The catheter shaft is inserted into a large outer tube, and a slightly smaller inner tube is inserted into the outer tube but over the catheter shaft. The outer tube is sealed along its length on the bottom of the catheter shaft, and the inner tube is sealed along its length on the top of the catheter shaft. The inner and outer tubes are sealed to each a line opposite the catheter shaft to form two channels between them. The seal opposite the shaft does not extend all the way to the distal end which functions to create the common space for communication between the inlet and outlet channels.

Yet another method of constructing such a device is to invert a large tube of thin plastic to create an inner passageway bounded by two layers of thin plastic, with the thin plastic layers essentially attached at their distal end. The space between the two plastic layers forms the inlet and outlet channels. The catheter shaft may be placed within the inner passageway, and the two layers

sealed to each other and to the catheter shaft along the bottom of the catheter shaft for the length of the inner passageway. The two layers of plastic are also sealed to each other along the top of the inner passageway from the proximal opening to a point just short of the distal end of the passageway. This creates an inlet channel 409 and an outlet channel 408 while leaving a common space 413 at the distal end of the sleeve.

In use, heat exchange fluid (not illustrated) is introduced under pressure into the inlet lumen 402 of the proximal shaft 404. It is directed down the shaft to the inlet orifice 415, at which point it enters the inlet channel 409 between the two layers of the plastic sheet on the inlet side. The fluid is then directed down the inlet channel, essentially inflating the billowing pleats of the sleeve somewhat. The fluid enters the common space 413 at the distal end of the blood channeling sleeve, and thereby enters the outlet channel 408 formed between the layers of plastic sheet on the outlet side of the sleeve. The fluid travels back down the length of the sleeve through the pleated channel to the outlet orifice 416 formed between the outlet channel 408 and the outlet lumen 403 in the catheter shaft. The fluid then travels down the outlet channel and out of the body. In this way, heat exchange fluid may be circulated through the structure to create heat exchange between blood flowing through the inner passageway in heat exchange proximity with the heat exchange fluid.

The formation of the inner passageway using a thin plastic sheets allows blood channeling sleeve to be collapsed to a low profile, for example, wrapping or folding it onto the reduced profile portion of the catheter shaft. This in turn provides a low profile device for insertion into the vascular system. When inflated by circulating heat exchange fluid, the billows created by the pleating

of the plastic sheet increases the surface area for heat exchange between the heat exchange fluid flowing in the catheter body and blood or other body fluid in heat exchange proximity within the interior passageway.

In another embodiment, as illustrated in Fig. 19, a heat transfer catheter 420 may have a catheter body 422 formed as a blood channeling sleeve forming an inner passageway 423 with a heat exchanger such as a heat exchange balloon catheter 424 positioned within the inner passageway 423. The heat exchanger may be any suitable heat exchanger, but in the embodiment shown the heat exchanger is a heat transfer balloon catheter, for example the type described in the previous sections or depicted in Fig. 17B or Fig. 24A below. The heat exchanger should be suitably sized and configured to provide sufficient heat exchange capabilities but allow adequate flow of fluid through the inner passageway.

The blood channeling sleeve has a proximal section 426 having a proximal opening 428. The wall of the sleeve in the proximal section may additionally form orifices 430 to further enhance perfusion of fluid from the surrounding body portion into the inner passageway.

The sleeve further has an intermediate section 432. The wall of the sleeve in the intermediate section is generally solid so that it generally will not permit fluid to exit the inner passageway through the wall of the sleeve in the intermediate section. The wall of the sleeve in the intermediate and indeed throughout its length, may be formed of a material with thermal insulation properties to thermally insulate fluid within the inner passageway from the tissue such as blood outside of the inner passageway. Thus fluid entering the

inner passageway at the proximal section will be channeled through the intermediate section to the distal section 434 of the blood channeling sleeve.

The distal section 434 of the blood channeling sleeve has a distal opening 436. Further, the wall of the blood channeling sleeve at the distal section may form orifices 438 that further enhance the flow of fluid out of the inner passageway and into the surrounding body portion such as a blood vessel. The distal end of the sleeve 436 may be proximal of the distal end of the heat exchanger 440, may be co-extensive with the end of the heat exchanger (not shown) or may extend distal of the heat exchanger as is shown in Fig. 26.

Additionally, there may be a central working lumen 442 that extends from the proximal end of the catheter shaft outside the patient's body to the distal end of the catheter shaft 443. The central lumen may extend past the distal end of the heat exchange balloon or even past the distal end of the sleeve. The working lumen may be used to accommodate a guide wire or to inject dye or insert a microcatheter for additional procedures such as lysing a clot or performing injections through the microcatheter or any of the other uses for the working lumen as described above, particularly in reference to the working lumen shown in Fig. 17. It will readily be appreciated that any of the above uses of the working lumen may be performed before, after, or even during the cooling of blood within the blood channeling sleeve. It may be one advantage of a catheter of the invention having a working lumen that the working lumen may be used for any of the above purposes at the same time that cooling is taking place and without inhibiting the cooling function of the catheter.

In use, the heat transfer catheter is placed in a fluid containing body, for example, as illustrated in Fig. 19, the arterial system. The proximal end of the

blood channeling sleeve may be, for example, located in the descending aorta

446. The distal end of the catheter body is positioned as desired, in the case

illustrated, in the left common carotid artery 448, which delivers blood to the

brain. The pressure differential between the aorta at the level of the proximal

5 end of the sleeve and the left common carotid artery at the distal end of sleeve is

sufficient to cause blood to flow through the sleeve, into left common carotid

artery and thence to the brain. In the case illustrated, blood enters the inner

passageway of the blood channeling sleeve located in the aorta, and travels

through the inner passageway and in heat exchange proximity with the heat

10 transfer balloon 424 in which heated or cooled heat exchange fluid is

circulating. The blood is thus heated or cooled. The heated or cooled blood is

then channeled out the distal end of the inner passageway where it flows into

the left common carotid artery. If the heat exchanger is cooling the blood,

cooled blood would thus be directed into the left common carotid and bath the

15 brain in cooled blood. This, in turn, if maintained for a sufficient length of

time, may result in regional cooling of the brain tissue with the advantages of

that condition noted above.

It should be noted that the placement of the proximal opening of the

blood channeling sleeve 423 down the descending aorta some distance from the

20 aortic arch 447 will provide for a longer path for the blood to travel over the

heat exchange balloon catheter in reaching the right common carotid than would

be the case if blood were captured and directed through the inner passageway by

a blood channeling sleeve located entirely within the left common carotid

artery. This longer flow path provides for increased cooling effect relative to

25 the shorter path. Also, the placement of the blood channeling sleeve at least

partially in the aorta provides for the use of a larger heat exchanger, for example a heat exchange balloon of greater diameter, than would be possible if the heat exchange portion of the catheter body was located in the right common carotid artery since the aorta is significantly larger in diameter than the right common carotid artery.

The distal section 434 of the blood channeling sleeve may also form a relatively tight fit around the blood vessel in which it is located. In this way, the pressure differential between the proximal and distal end of the sleeve is maximized, and essentially all the blood flowing from, for example, the aorta to the carotid artery passes through the inner passageway and is heated or cooled by the heat exchanger. The wall of the blood channeling sleeve may form an occlusive shoulder to facilitate the sealing of the artery. The heat exchanger is, for example, a heat transfer balloon that holds the walls of the catheter body extended, and the heat exchange balloon has fins or the like that will permit significant blood flow between the heat exchange balloon fins and between the inner walls of the inner passageway and the balloon, most if not all the blood entering the right common carotid artery would pass over the heat exchanger and thus is treated by heating or cooling.

Another embodiment of the heat transfer catheter of the invention is illustrated in Fig. 20. The catheter 450 may be provided with a blood channeling sleeve 452 for the receipt and direction of body fluid such as blood. The sleeve may be essentially funnel shaped, having a distal region 454 that is significantly larger in diameter than its distal region 456. In this manner, the exterior surface of the blood channeling sleeve may form an occlusive shoulder that may be pressed or rest against appropriate anatomical structures such as the

interior of the artery in question, so that most or virtually all of the blood entering the artery in question is directed through the interior passageway 464 of the blood channeling sleeve before entering the artery. In the example illustrated, the artery into which the catheter body is inserted is the left common carotid artery, but it may be readily appreciated by those of skill in the art that the distal portion of the blood channeling sleeve may be configured for similar placement in other desired locations.

The distal region may be elongate with a substantially cylindrical shape and terminate in a distal opening 458. Likewise, the proximal region may have a proximal opening 460 which may have a valve 462 for opening or closing the proximal opening or otherwise controlling entrance of the blood to the interior passageway 464 within the catheter body.

The interior of the proximal region 454 contains a heat exchanger. The heat exchanger depicted is a series of spiral fins 466 which may contain contains heat transfer balloons or balloon lobes for circulating heat transfer fluid. Alternatively the fins may be other types of heating or cooling mechanisms such as electric resistance heaters.

The heat transfer catheter may be provided with a catheter shaft 468 which may be provided with a working lumen 470 which may extend out of the patient's body when the heat exchange catheter is in place, and thus provide for the injection of drugs, fluoroscopic dye, or the like, and may accommodate a guide wire 472 for the placement of the heat transfer catheter. The shaft may also have channels (not shown) for the flow of heat transfer fluid, or contain electrical wires (not shown) to connect to the heat exchangers or sensors (also not shown) on the catheter.

In use, the heat transfer catheter 450 is placed in the desired body location. In the illustration of Fig. 20 the catheter is placed so that the proximal portion of the blood channeling sleeve 454 is within the aorta 474 and the distal portion 456 is within the left common carotid artery 476. Blood flows down the aorta (illustrated with the arrows labeled "F") and may enter the proximal opening 460 of the catheter body if the valve 462 is open. The pressure differential between the blood in the aorta and the blood in the left common carotid is sufficient to cause the blood to flow up the inner passageway. As the blood flows up the inner passageway it passes in heat exchange proximity with the heat exchange fins 466 and is heated or cooled. The heated or cooled blood is channeled into the left common carotid by the blood channeling sleeve, and ultimately the heated or cooled blood baths the brain. If maintained for a sufficient length of time this may result in regionally heating or cooling of the brain.

Another embodiment of the heat transfer catheter of the invention is illustrated in Fig. 21. The catheter 490 illustrated in that drawing is provided with a blood channeling sleeve 492 that is configured for placement in the blood vessels of the patient's body, for example the main arteries leading to the brain region 494. The blood channeling sleeve is essentially cylindrical in shape, but may have a slightly enlarged proximal section 496 that creates a shoulder in the catheter body that may act as an occlusive shoulder 498 when the blood channeling sleeve is placed in an artery, such as an artery branching off the coronary arch.

The blood channeling sleeve is shaped as a tube and forms an inner passageway 500 that extends from the proximal section 496 that begins with a

proximal opening 502 to the distal end which terminates at a distal opening.

504. A heat exchanger such as a finned balloon heat exchange catheter 506 as described and illustrated in Figs. 17 B and 24 A is located in the catheter body and may be contained entirely within the inner passageway 500 of the sleeve.

5 The fins 508 provide for added heat transfer surface relative to a cylindrically shaped heat exchange balloon, and also create flow channels between the fins for the flow of blood from the proximal opening, over and between the fins of the heat exchange balloon, and out the distal end of the inner passageway. A catheter shaft 509 may also be provided as described in conjunction with the
10 other embodiments described above.

Figs. 21B-D illustrate the operation of a control system to regulate the opening and closing of a valve assembly 460 that may be formed along any section of the sleeve 492 such as at the proximal opening 502 in order to control the flow of blood within the inner passageway 500. For example, a bi-leaflet
15 valve 510 may be positioned at the proximal opening of the sleeve 492 around the catheter shaft. The valve 510 may have at least one closed position as shown in Fig. 21B and at least one open position as shown in Fig. 21C. Other valves such as one-way valves may be selected for the catheter body, and the valve may be opened and closed to a variable degree to control the amount of
20 fluid passing through the sleeve at selected points in time.

The valve 510 may be synchronously opened and/or closed in accordance with the heartbeat of a patient as illustrated by the graph of Fig. 21D. Because aortic blood flow (L/min) is pulsatile and fluctuates at different time intervals during the heartbeat cycle, a valve may be selectively
25 opened when a relatively large amount of blood is released from the heart. At

the same time, the valve may be selectively closed to retain the blood within the inner passageway 500 when the blood flow is slower. Alternatively, the valves may be controlled to cause blood to flow more slowly through the inner passageway to allow for all the blood passing in to the artery distal of the catheter body flows slowly over the head exchanger for maximum heating or cooling.

As described above, a catheter control unit may simultaneously monitor body conditions or sensed stimuli such as the heart rate, temperature at various locations, and pressure within the apparatus or within the patient. When the valve 510 is in a closed position (Fig. 21B), blood or fluid is retained within the inner passageway 500 and effectively cooled by the internally positioned heat exchanger 506. A valve in a closed position may prevent or minimize backflow of cooled fluid away from the brain. After the blood is allowed to cool, when the heart begins to send more blood in the direction of the heat transfer catheter, the valve may be activated to assume an open position (Fig. 21C) to allow the cooled blood to be pushed out of the confined cooling area by the relatively warmer incoming blood. When the pressure or surge of blood from the heart subsides thereafter, the valve 510 may again close, and this cooling and pumping cycle continues repeatedly until the desired level of regional hypothermia in the brain is achieved. Fig. 21D is a graphic representation of the cycle just described.

Although many of the embodiments of the invention described thus far are illustrated as either a cooling apparatus or a heating apparatus, it should be understood that any combination of these variations may form a series or a network of thermoregulating devices. For example, as shown in Fig. 22, a heat

exchange catheter 520 includes a heat transfer balloon 524 with a plurality of collapsible cooling fins 522 placed in the aortic 526 region. A suitable heat transfer balloon catheter with fins has been previously described. The heat exchange catheter may be provided with a catheter shaft 528. The heat
5 exchange catheter may have a heating element 530 formed at a different location along the catheter shaft than the cooling balloon 524. The shaft 528 may include a pair of longitudinal fluid paths (not shown) for circulating hot heat transfer medium to the heating element as well as an additional pair of fluid paths (not shown) that circulate cold heat transfer medium to the cooling
10 balloon 522. Alternatively, the heating fin 530 may include a resistance heater or other heating elements known in the art. In the case of a resistance heating element, electrical current may pass through wires withing the shaft (not shown) to the heat-generating element.

The cooling balloon 522 may include an insulated underside 534. Blood
15 flowing in a certain direction, for example to the brain region, may thus be preferentially cooled relative to blood flowing to other areas of the patient's body, for example to the lower body. In the example illustrated in Fig. 22, the heat transfer region includes a curved cooling balloon that is thermally insulated along the inner radius of its curvature and thermally conductive along its outer
20 radius of its curvature. The cooling balloon may be placed in the aortic arch. Blood is pumped by the heart into the aorta (indicated by arrows F) and some flows over the top surface 523 of the cooling balloon 522 in heat exchange proximity to the balloon surface. This blood is cooled, and the cool blood then flows naturally to the brain region. Blood flowing past the inner, insulated
25 curvature of radius 525 is not cooled, and thus blood of normal temperature

flows down the aorta and to the lower body. It may be noted that, in the example illustrated, cool blood flows to the brain region through all of the arteries extending from the aortic arch without the need to cannulate each of those arteries. In such a configuration, it is also unnecessary to provide the heat transfer catheter with a blood channeling sleeve since the directional cooling is
5 obtained without using the catheter to direct the cool blood to specific arteries.

As described, heating and cooling mechanisms may be formed at various locations along the shaft 528 of the heat transfer catheter 524. Alternatively, multiple heating and cooling catheters may be used in
10 combination or cooperatively. As previously described, a common catheter control unit may monitor and control multiple devices individually or collectively, and may be responsive to one or more sensors (not shown) such as pressure sensors or temperature sensors.

Another aspect of the invention is illustrated in Fig. 23 whereby heated
15 or cooled blood may be directed to a specific location such as a tumor, or organ such as the heart, through a relatively small vessel. A heat transfer catheter 550 is provided having a blood channeling sleeve 552, which sleeve has a proximal opening 554 and a distal end section 552. A heat exchanger 558 which may be, for example, a finned heat transfer balloon as described above, is located within
20 the blood channeling sleeve. The heat transfer catheter has a catheter shaft 560, which extends from at least the interior of the blood channeling sleeve to a distal end 562. The distal section of the sleeve is sealed around the catheter shaft 564. The catheter shaft 560 has a perfusion lumen 566 extending between blood inlet orifices 568, 570 formed in the catheter shaft at a point within the
25 blood channeling above, and the distal end 562 of the shaft. The blood inlet

orifices provide fluid communication between the perfusion lumen and the interior 572 of the blood channeling sleeve.

In use, the heat transfer catheter 560 is placed into a patient's vasculature, for example the aorta 574, and is positioned so that the distal end 562 of the catheter shaft 560 in a desired location, for example, in the coronary ostium. The pressure differential between the blood in the aorta at the proximal end of the blood channeling sleeve 552 and the distal end 566 of the catheter shaft causes blood to flow through the proximal opening of the sleeve, through 554 the inner passageway and in heat transfer proximity to the heat exchanger at 10 which time the blood will be heated or cooled, and into the blood inlet orifices through the central lumen of the catheter shaft and out the distal tip of the central lumen 578. In this way, a stream of heated or cooled blood may be directed to a specific organ or tissue, for example the heart or tumor, and bath that organ or tissue in the heated or cooled blood. If a sufficient portion of the 15 organ or tissue's blood supply is treated in this manner for a sufficient time, regional heating or cooling of the organ or tissue in question will result.

The central lumen may extend from the distal tip 578 to a proximal opening outside the body. In this way the central lumen may function as a working lumen for all applications as previously described including 20 angiography and acting as a guide catheter for angioplasty. The central or working lumen may be sized to function as a guide catheter and allow simultaneous insertion of an angioplasty catheter and infusion of cold blood through the central or working lumen.

An alternative construction to the heat exchange balloon as illustrated in 25 Fig. 17 is shown in Fig. 24A wherein the heat exchange region is formed using

a series of three collapsible balloon lobes 902, 904, 906 located around a central collapsible lumen 908. A proximal shaft 910 is formed having two channels, an inlet channel 912 and an outlet channel 914. The interior of the shaft is divided into two lumens by webs 916, 917, but the lumens do not occupy equal portions of the interior of the shaft. The inlet channel occupies about 1/3 of the circumference of the interior, the outlet channel occupies about 2/3 of the circumference of the interior for reasons that will be explained below.

At the heat exchange region of the catheter, a transition 915 is formed between the shaft 910 and the tube 911 forming the central collapsible lumen 908. The outlet channel is plugged 917, the tube 911 is affixed over the shaft 910 by, for example gluing, at the transition 915, and the shaft ends with the tube (not shown). In this way, as shown in Fig. 24C, the inlet channel in this portion of the catheter occupies the entire circumference of the shaft. At the distal end of the balloon, inlet orifices 918, 920, 922 are formed between the inlet channel and the three collapsible balloons. At the proximal end of the heat exchange region, outlet orifices 924, 926, 928 are formed between the interior of each balloon and the outlet channel in the shaft. As may be seen in Fig. 30D, the configuration of the outlet channel is such that communication with the interior of each of the three balloons is possible.

As may be appreciated, heat exchange fluid (not shown) may flow down the inlet channel in the shaft 912, continue down lumen 908 to the distal end of the heat exchange region, exit the lumen through the inlet orifices 918, 919, 920 to the interior lumens of the balloon lobes 919, 921, 923, travel back down each of the three balloons and re-enter the shaft through the outlet orifices 924, 926, 928 and then down the outlet channel 914 toward the proximal end of the

catheter. In this way heat exchange fluid may be circulated through the three balloons to add heat to the blood flowing in heat transfer proximity to the balloons if the heat exchange fluid is warmer than the blood, or to remove heat from the blood if the heat exchange fluid is cooler than the blood. The material
5 from which the balloons are made is made of a material that will permit significant thermal exchange between the heat exchange fluid on the interior of the balloon and the body fluid such as blood flowing in heat exchange proximity to the surface of the balloon. One such appropriate material is very thin plastic material, which may also be made strong enough to withstand the
10 pressure necessary for adequate flow of the heat exchange fluid.

It may also readily be appreciated that the same heat exchange balloon of the type described here and in conjunction with Fig 17 may be used to add heat to the blood stream or remove heat from the blood stream depending on the relative temperature of the heat exchange fluid and the blood flowing in heat
15 exchange proximity to the balloon. That is, the same device at the same location may be used alternately to add or to remove heat merely by controlling the temperature of the heat exchange fluid within the device.

A heat exchange device may also be supplied as a kit comprising the heat exchange device and a set of instruction for using the heat exchange
20 device. The heat exchange device may comprise, for example, a heat exchange catheter as described in this application. The instructions for use will generally instruct the user to insert the heat exchange device into a body fluid containing region and to establish the temperature of the heat exchange device to affect the temperature of the body fluid. The instructions for use may direct the user to

heat or cool the body fluid to achieve any of the purposes described in this application.

While all aspects of the present invention have been described with reference to the aforementioned applications, this description of various
5 embodiments and methods shall not be construed in a limiting sense. The
aforementioned is presented for purposes of illustration and description. It shall
be understood that all aspects of the invention are not limited to the specific
depictions, configurations or relative proportions set forth herein which depend
upon a variety of conditions and variables. The specification is not intended to
10 be exhaustive or to limit the invention to the precise forms disclosed herein.
Various modifications and insubstantial changes in form and detail of the
particular embodiments of the disclosed invention, as well as other variations of
the invention, will be apparent to a person skilled in the art upon reference to
the present disclosure. It is therefore contemplated that the appended claims
15 shall cover any such modifications or variations of the described embodiments
as falling within the true spirit and scope of the invention.

- 71 -

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

25

30

- 72 -

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A catheter device which is insertable into an anatomical structure of a mammalian patient through which body fluid may flow to a target region of the patient, said catheter device being operative to effect in situ heat exchange with the body fluid to effect temperature alteration of the target region, said catheter device comprising:
 - an elongate flexible catheter having a proximal end and a distal end, the entire length of said flexible catheter being defined as the distance from its proximal end to its distal end;
 - at least one fluid lumen in through which said thermal exchange fluid may be circulated;
 - a heat exchanger located at a first location on the catheter, said heat exchanger being operative to exchange heat between body fluid in heat exchange proximity to said heat exchanger and heat exchange fluid circulating through said heat exchanger, said first location extending less than the entire length of the catheter;
 - a body-fluid channeling sleeve formed about a segment of said catheter including the first location at which at least a portion of said heat exchanger is located, said body fluid channeling sleeve defining a body fluid flow space between said body fluid channeling sleeve and said catheter, said body fluid channeling sleeve having a body fluid inlet located proximal to the heat exchanger and a body fluid outlet located distal to at least a portion of said heat exchanger, such that body fluid will enter the flow space through said body fluid inlet, will then flow through said flow space in heat exchange proximity to at least a portion of said heat exchanger, and then out of said body fluid outlet and to a conduit in fluid communication with said target region of the patient's body.
2. The catheter device of claim 1 for controlling the temperature of a target region of the patient's body to which a body fluid is flowing through a first anatomical conduit of a first diameter, and wherein said first anatomical conduit is connected to and in fluid communication with a second anatomical conduit of a second diameter larger than said first diameter, wherein said body-fluid channeling sleeve has a distal portion and a proximal portion, said body fluid outlet located on said distal portion and said body fluid

- 73 -

inlet located on said proximal portion, said distal portion is sized to be advanced into said first anatomical conduit while said proximal portion remains positioned within the second anatomical conduit, such that body fluid from said second anatomical conduit will enter the flow space through said body fluid inlet, will then flow through said flow space in heat exchange proximity to said heat exchanger, and then out of said body fluid outlet into said first conduit and thus to said target region of the patient's body.

3. A catheter device as in claim 2 wherein the cross-sectional diameter of said distal portion of the blood channeling sleeve is smaller than the cross-sectional diameter of said proximal portion of the blood channeling sleeve.

4. A catheter device as in claim 2 wherein said distal portion has a shoulder formed thereon, said shoulder sized and configured to fit snugly within said anatomical conduit such that substantially all flow of said body fluid from said second anatomical conduit to said first anatomical conduit flows through said body fluid channeling sleeve.

5. The catheter device of claim 1 wherein the heat exchanger comprises:
at least one balloon through which said thermal exchange fluid is circulated, and
said heat exchange fins comprise a plurality of lobes.

6. The catheter device of claim 1 wherein said at least one heat exchange fin comprises at least one outwardly extending longitudinal fin.

7. The catheter device of claim 1 wherein said at least one heat exchange fin comprises at least one outwardly extending annular fin.

8. The catheter device of claim 1 wherein said at least one heat exchange fin comprises at least one outwardly extending helical fin.

9. The catheter device of claim 1 wherein said at least one heat exchange fin comprises a plurality of outwardly extending protuberances.

- 74 -

10. The catheter device of claim 1, said catheter further comprising an insertion portion, said insertion portion for insertion into the patient, said insertion portion extending from the distal end to a point short of the proximal end; and a working lumen, said
5 working lumen extending through at least part of said insertion portion.

11. A system comprising the catheter device of claim 10 further in combination with:
a guide wire sized to be passable through said working lumen.

10 12. A system comprising the catheter device of claim 10 further in combination with:
an apparatus for infusion of a medicament through said working lumen.

13. The system of claim 12 wherein said apparatus for infusion contains a medicament selected from the group of medicaments consisting of:

15 a thrombolytic agent;
an anticoagulant;
a neuro-protectant;
a barbiturate;
an anti-seizure agent;
20 an oxygenated perfusate;
a vaso-dilator;
an agent which prevents vaso-spasm;
an agent to prevent platelet activation; and,
an agent to deter the adhesion of platelets.

25 14. A system comprising the catheter device of claim 10 further in combination with:
a diagnostic probe which is passable through said working lumen.

15. A system as in claim 14 wherein said diagnostic probe is selected from the group
30 consisting of:
an angiographic catheter;

- 75 -

a temperature sensor;
a pressure sensor;
a blood gas sensor; and
an enzyme sensor.

5

16. A system comprising the catheter device of claim 10 further in combination with:
an apparatus for infusion of a radiographic contrast agent through said working
lumen; and,
an imaging apparatus for imaging the radiographic contrast agent which has been
10 infused through said working lumen.

17. A system comprising the catheter device of claim 10 further in combination with a
therapeutic apparatus which is passable through said working lumen.

- 15 18. The system of claim 17 wherein said therapeutic apparatus is selected from the
group of therapeutic apparatus consisting of:

an angioplasty catheter;
an embolectomy catheter;
an occlusion member delivering catheter;
20 an embolization member delivering catheter;
an electro-cautery device; and,
a microcatheter.

19. A catheter device as in claim 1 wherein said body fluid inlet is provided with
25 valves, said valves operable between an open condition and a closed condition, said open
condition permitting flow of body fluid into said blood channeling sleeve through said
body fluid inlet, said closed condition preventing the flow of body fluid out of said blood
channeling sleeve through said body fluid inlet.

- 30 20. A catheter device as in claim 1 wherein said catheter has a distal shaft portion, said
distal shaft portion extending from within said blood channeling sleeve distal of said blood

PROPENWUCV3341-99 response.doc-01/03/04

- 76 -

channeling sleeve, said distal shaft portion having a central lumen there through, said central lumen in fluid communication with said flow space at a first location and in fluid communication with said conduit in communication with said target region at a second location.

5

21. A catheter device as in claim 20 wherein said blood channeling sleeve is sealed around said distal shaft distal of said first location.

22. A catheter device substantially as hereinbefore described, with reference to the
10 accompanying drawings.

10

23. A system having a catheter device in combination with an apparatus for infusion substantially as hereinbefore described, with reference to the accompanying drawings.

15 24. A system having a catheter device in combination with a diagnostic probe
substantially as hereinbefore described, with reference to the accompanying drawings.

15

25. A system having a catheter device in combination with a therapeutic apparatus substantially as hereinbefore described, with reference to the accompanying drawings.

20

26. A system for controllably affecting the temperature of a patient substantially as hereinbefore described, with reference to the accompanying drawings.

25

DATED this 9th day of March, 2004

RADIANT MEDICAL, INC.

By its Patent Attorneys

30 Davies Collison Cave

1/21

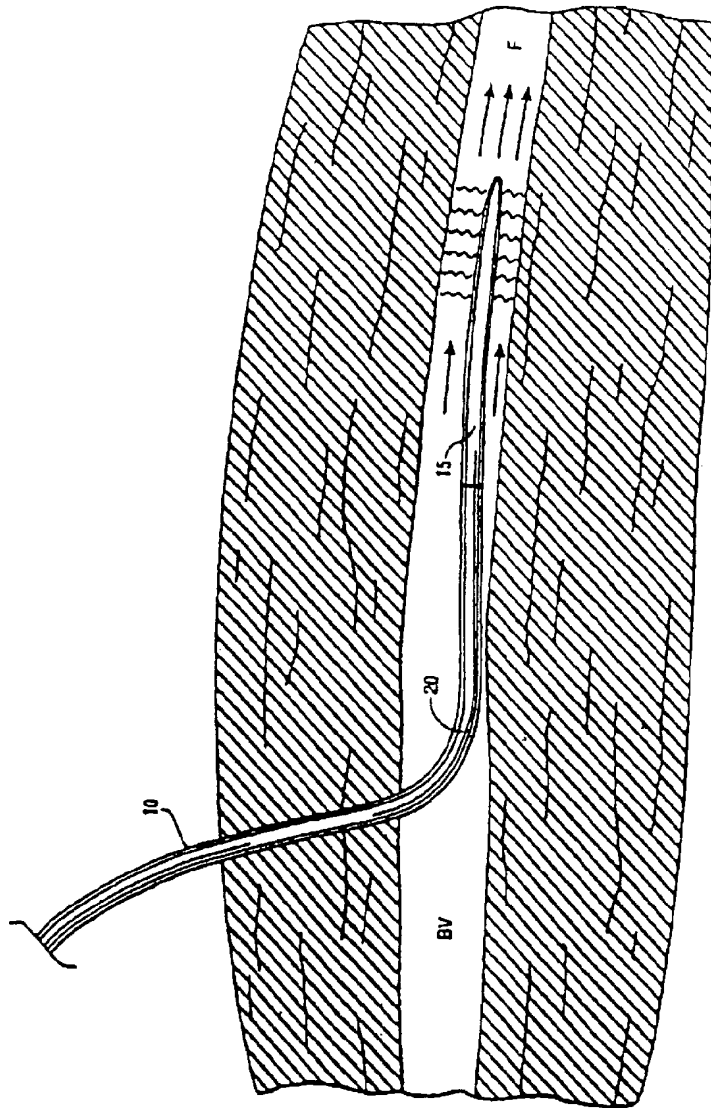


FIG. 1

SUBSTITUTE SHEET (RULE 26)

2/21

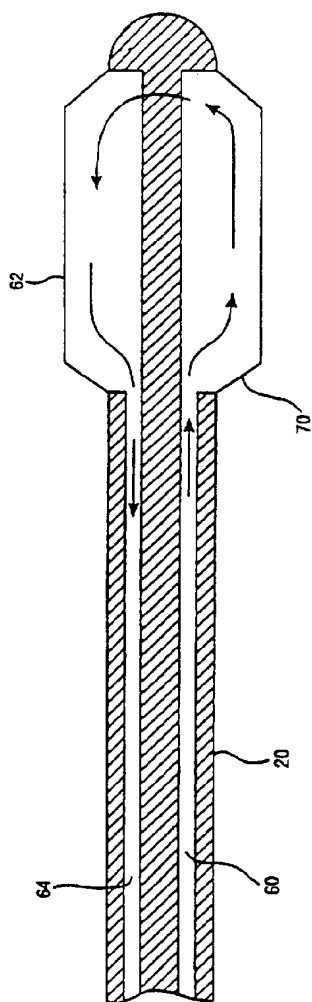


FIG. 2

SUBSTITUTE SHEET (RULE 26)

3/21

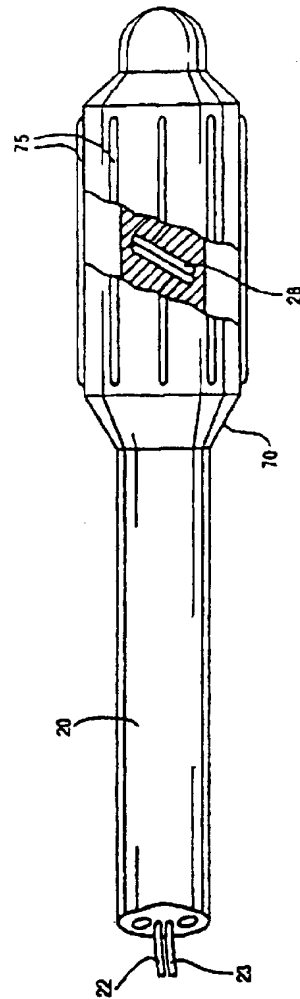


FIG. 3

SUBSTITUTE SHEET (RULE 26)

4/21

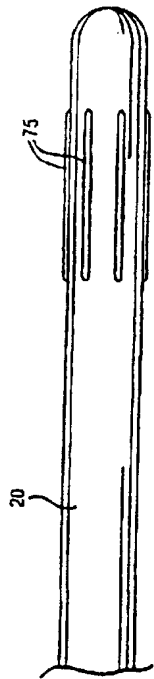


FIG. 4A




FIG. 4B




FIG. 4C

SUBSTITUTE SHEET (RULE 26)


5/21

CONTROL SCHEME


1. Determine a pre-selected temperature for a target tissue.
2. Select an upper variance set point.
3. Select a lower variance set point.
4. Obtain a sensed temperature for the target tissue.
5. Place a heat exchanger capable of either heating or cooling body fluid in heat exchange proximity with body fluid which subsequently flows to the target tissue.
6. Determine whether the heat exchanger is cooling, heating, or off.
 - 6a. If cooling, compare the sensed temperature with the pre-selected temperature. If the sensed temperature is greater than the pre-selected temperature, continue cooling. Return to step 6. If the sensed temperature is equal to or less than the pre-selected temperature, turn the heat exchanger off. Return to step 6.
 - 6b. If the heat exchanger is heating, compare the sensed temperature with the pre-selected temperature. If the sensed temperature is less than the pre-selected temperature, continue heating. Return to step 6. If the sensed temperature is equal to or greater than the pre-selected temperature, turn the heat exchanger off. Return to step 6.
 - 6c. If the heat exchanger is off, compare the sensed temperature with the upper variance temperature. If the sensed temperature is equal to or greater than the upper variance set point, begin cooling. Return to step 6. If the sensed temperature is equal to or less than the lower variance set point, begin heating. Return to step 6. If the sensed temperature is neither, the remain off and return to step 6.

FIG. 5**SUBSTITUTE SHEET (RULE 26)**

6/21

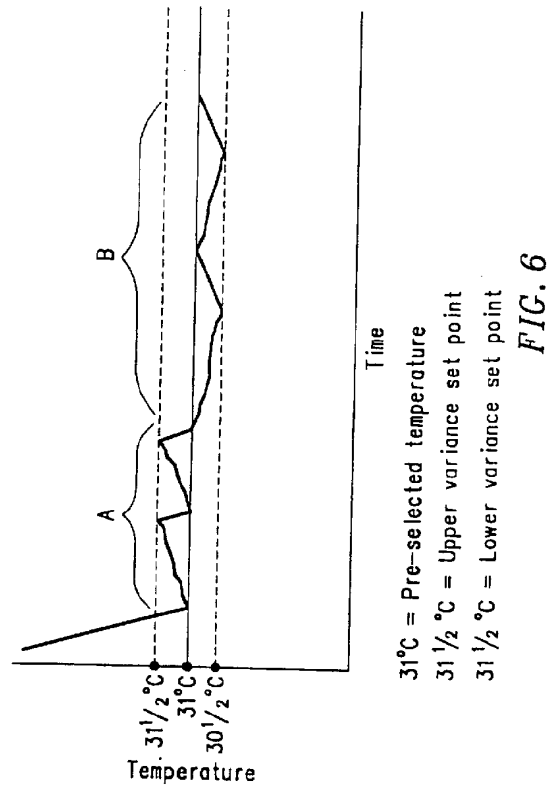

SUBSTITUTE SHEET (RULE 26)

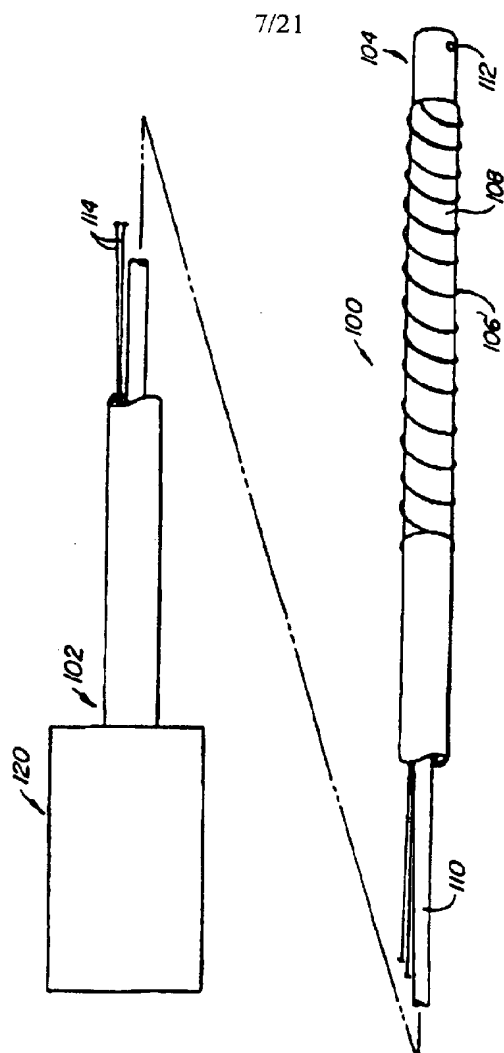

SUBSTITUTE SHEET (RULE 26)

8/21

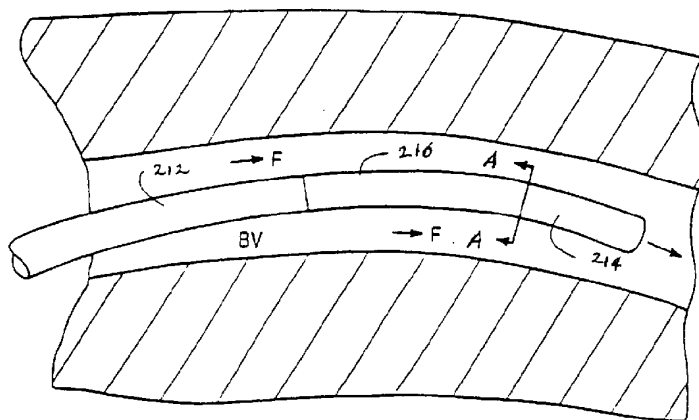


FIG. 8




FIG. 8A

SUBSTITUTE SHEET (RULE 26)

9/21

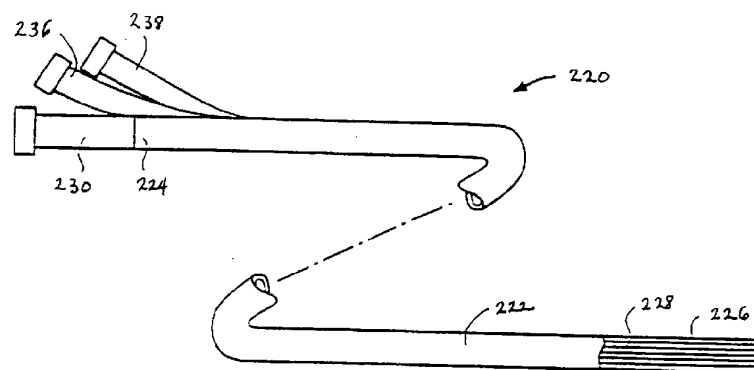


FIG. 9

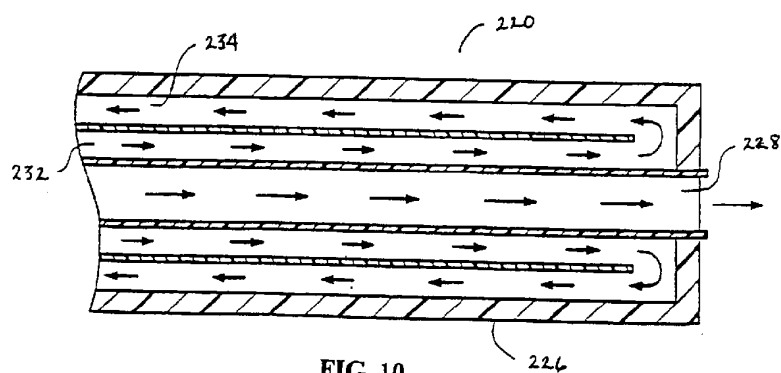


FIG. 10

SUBSTITUTE SHEET (RULE 26)

10/21

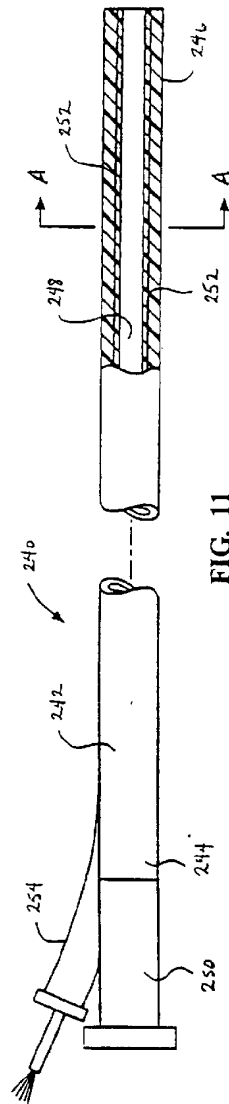


FIG. 11

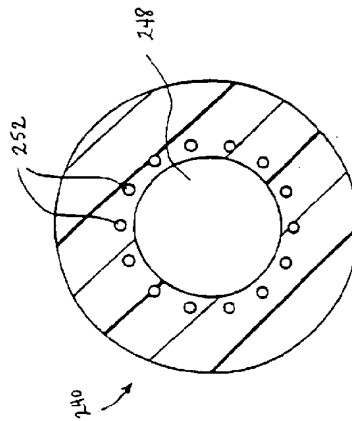


FIG. 11A

SUBSTITUTE SHEET (RULE 26)

11/21

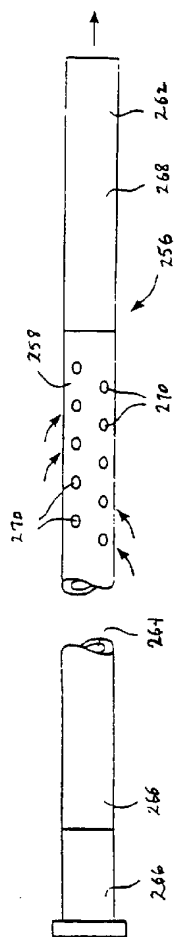


FIG. 12

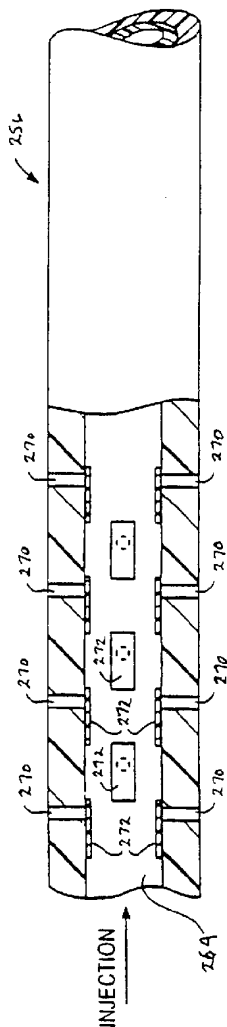


FIG. 13


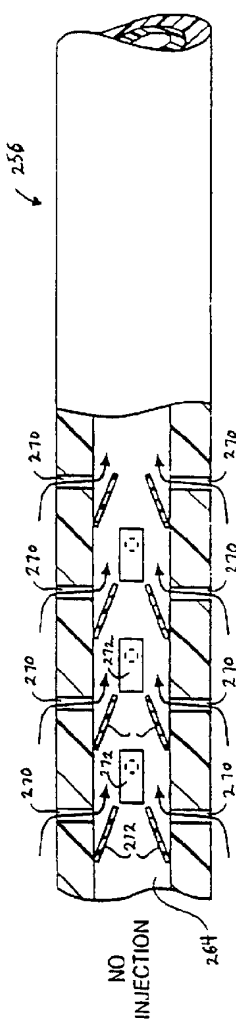


FIG. 14

SUBSTITUTE SHEET (RULE 26)

12/21

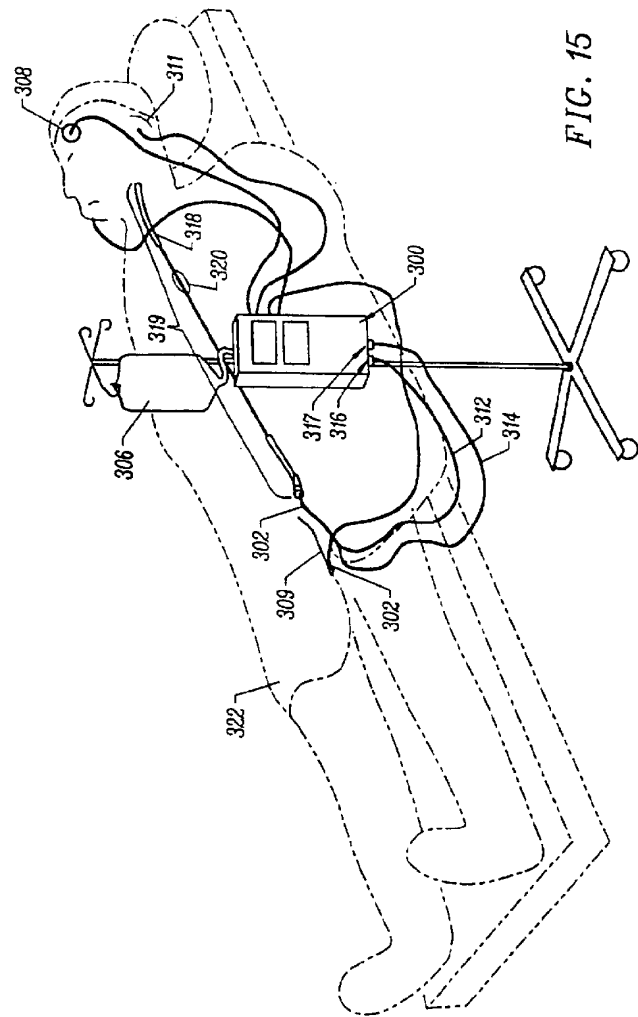

SUBSTITUTE SHEET (RULE 26)

13/21

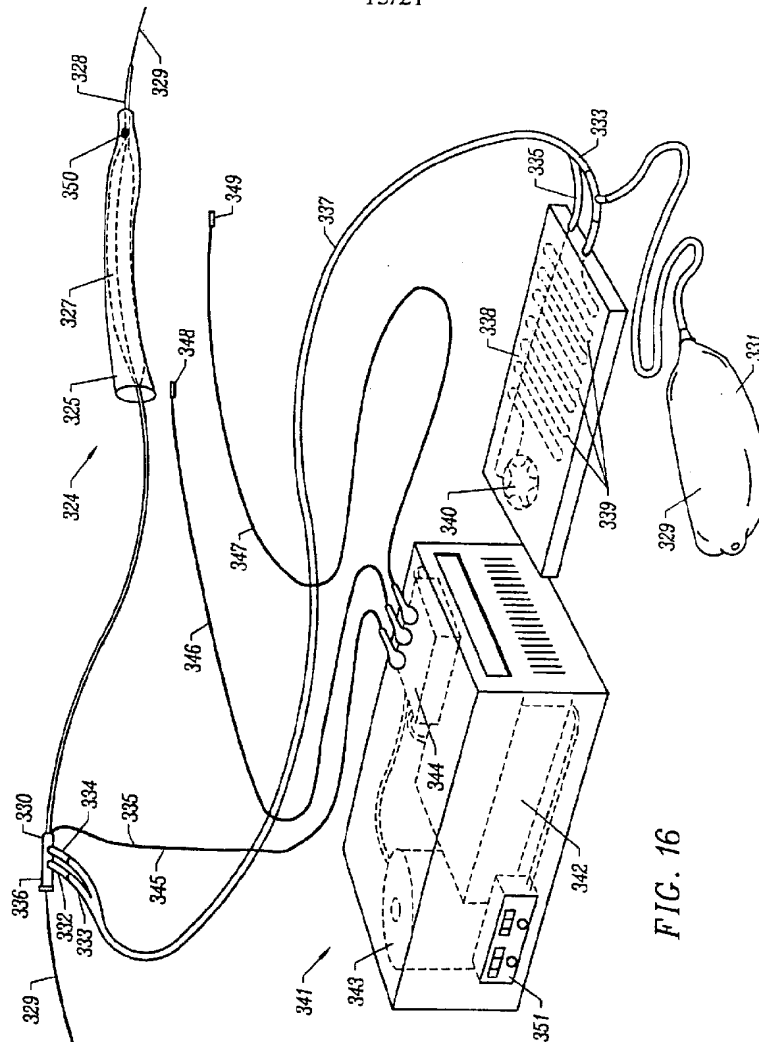


FIG. 16

SUBSTITUTE SHEET (RULE 26)

14/21

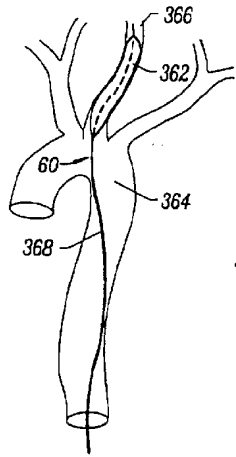


FIG. 17A

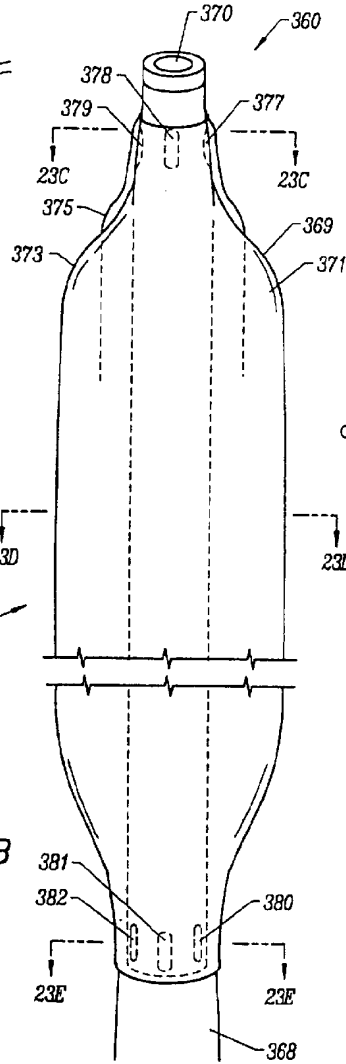


FIG. 17B




FIG. 17C




FIG. 17D




FIG. 17E

SUBSTITUTE SHEET (RULE 26)

15/21

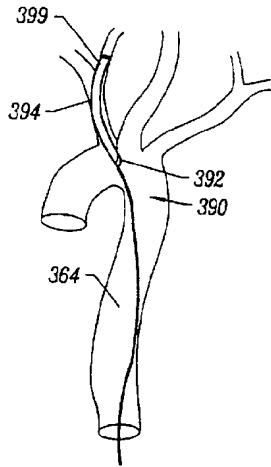


FIG. 18A




FIG. 18C




FIG. 18D




FIG. 18E




FIG. 18F

FIG. 18G

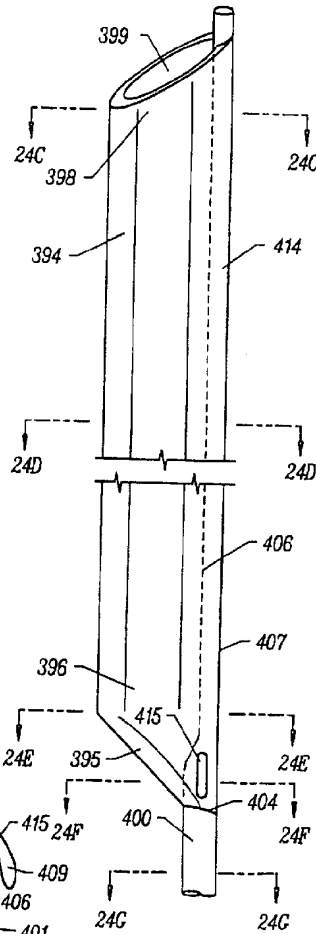


FIG. 18B

SUBSTITUTE SHEET (RULE 26)

16/21


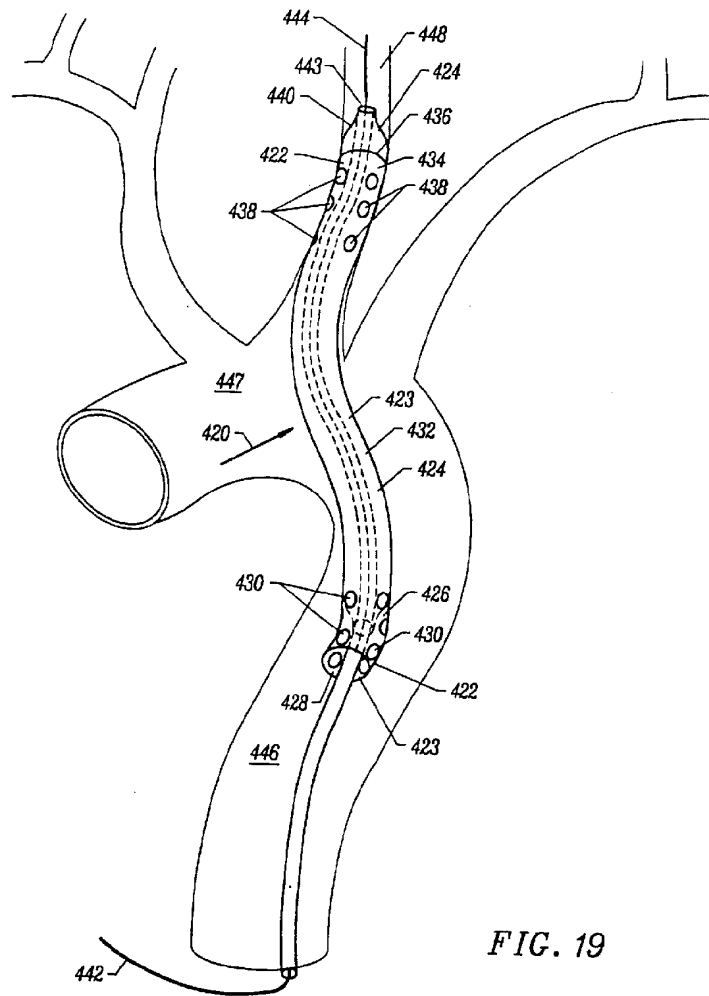


FIG. 19

SUBSTITUTE SHEET (RULE 26)

17/21

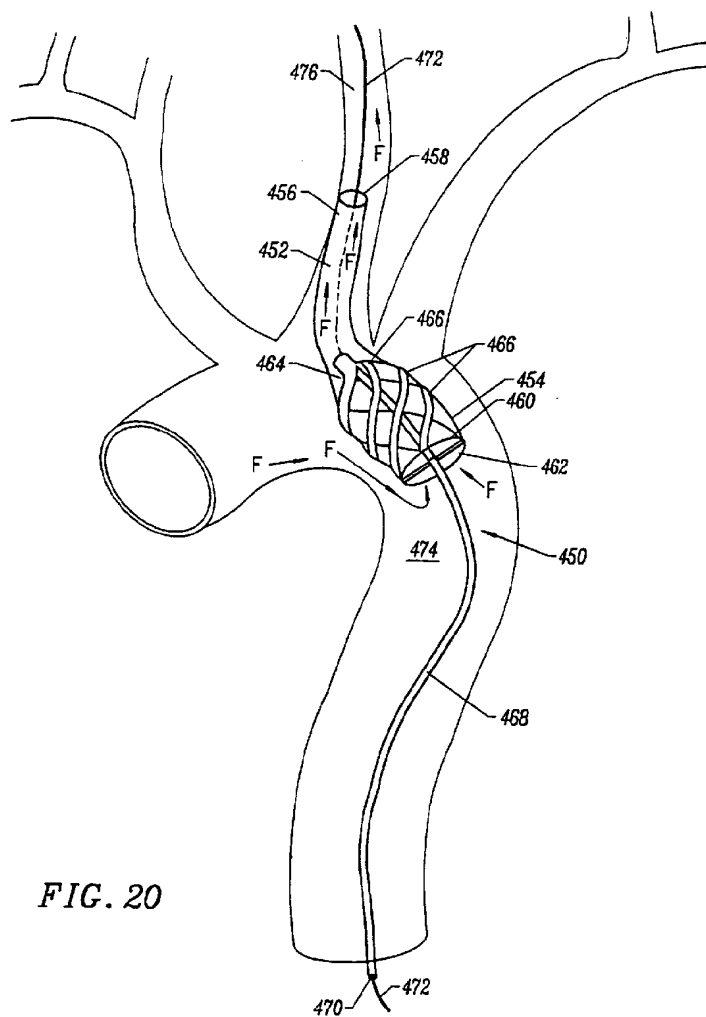

SUBSTITUTE SHEET (RULE 26)

18/21

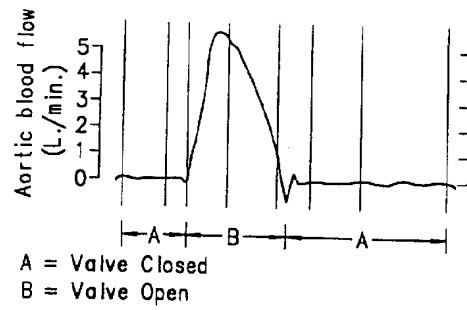


FIG. 21D

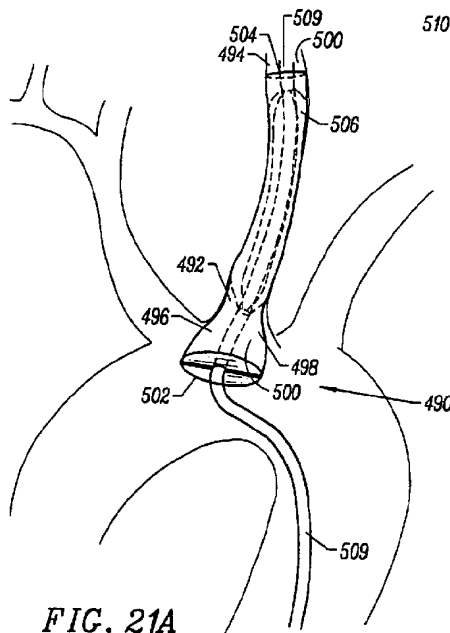


FIG. 21A

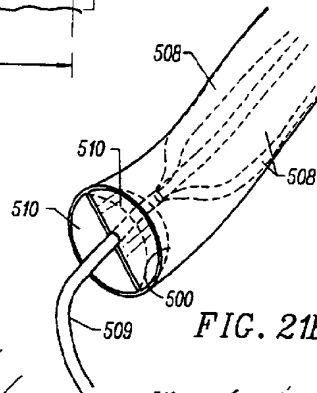


FIG. 21B




FIG. 21C

SUBSTITUTE SHEET (RULE 26)

19/21

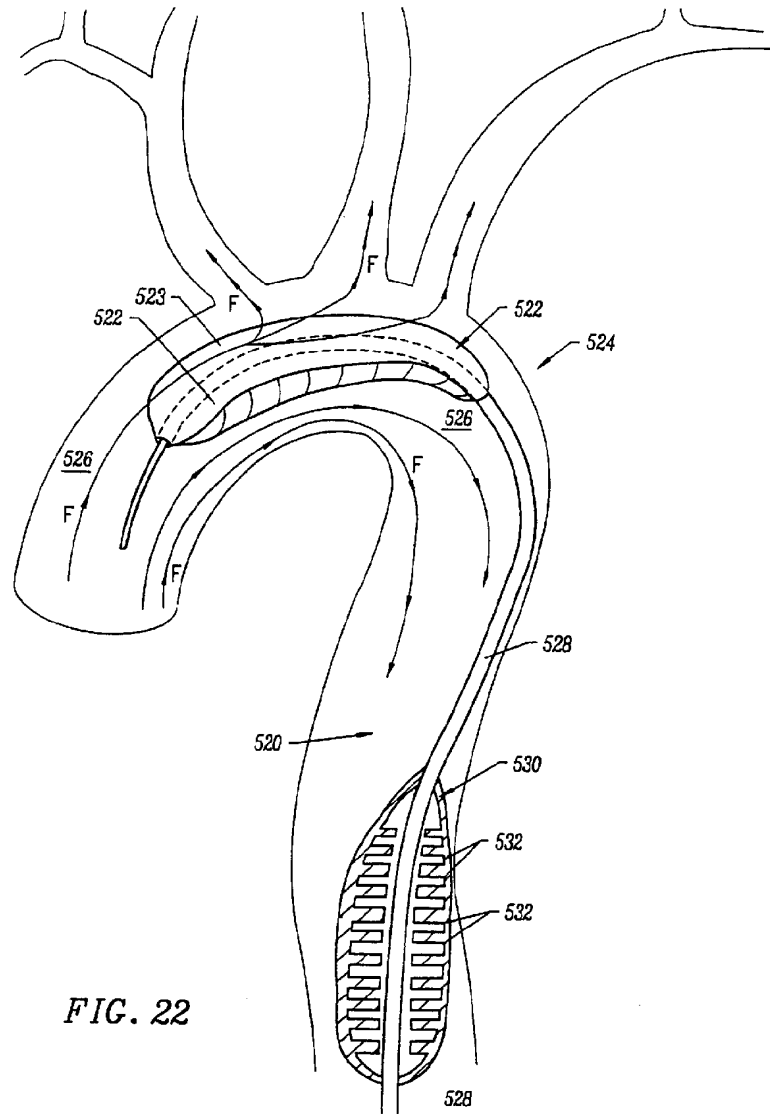


FIG. 22

SUBSTITUTE SHEET (RULE 26)

21/21

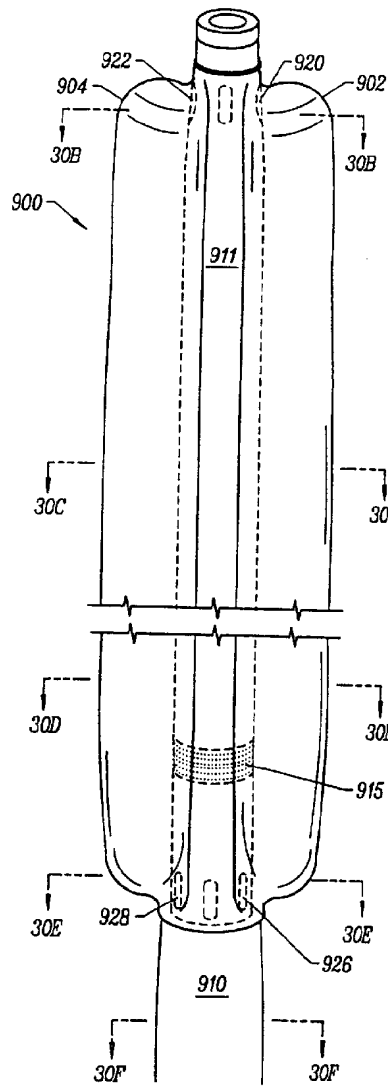


FIG. 24A

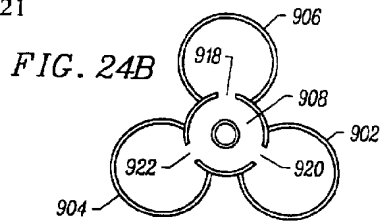


FIG. 24B




FIG. 24C




FIG. 24D




FIG. 24E




FIG. 24F

SUBSTITUTE SHEET (RULE 26)